



Fusion International Group LLC

PERSONAL PROTECTIVE EQUIPMENT

HEAD TO TOE PROTECTION









2021-22



P.O BOX. 124401, Aspin Tower, Sheikh Zayed Road, Dubai, U.A.E. Email: sales@fusiongroupfz.com, www.fusiongroupfz.com Tel/Fax +971 (0)67649782, Mob: +971 (0) 58 586 3916 / 54 768 3916

CONTENTS

Pg#	Category	Brand
A1-	A4 Head Protecti	ion
A1 A1 A1	Guard Chin Strap Suspension	∆MERIZA E
A2 A2 A2	3M H-700R Series Unvented 3M H-701V Vented 3M H-801R	ЗМ
A3 A3 A3	MSA V-Gard Unvented MSA V-Gard 500 Vented MSA Full Brim	MSA The Safety Company
A4 A4 A4	Bullard LTX Series Clip Cap Bump Cap	Bullard
B1-	B10 Eye Protecti	on
B1 B1	Hawk - Basic Plus Range Ryder - Basic Plus Range	EMPIRAL
B2 B2	Edge - Basic Plus Fargo - Basic Plus Range	EMPIRAL
B3 B3	Super-Fit - Premium Range Vista - Premium Range	EMPIRAL
B4 B4	Sporty - Premium Range Metallic - Premium Range	EMPIRAL
B5 B5	Active - Premium Range Elite - Premium Range	EMPIRAL
B6 B6	Maxima - Premium Plus Rang Flash - Premium Plus Range	ge EMPIRAL
B7 B7	Vision Clear Vision Grey	EMPIRAL

Vision Grey Visor Combo

Pg#	Category	Brand
B8	UltraSonic Goggle	
B8	Tactical Spoggle	\mathbf{E}
B8	RX Ultra Goggle Clear	EMPIRAL
B9	Virtua AP Series	
B9	Virtua Lente Cinza	3M
B9	3M 2890SA	
B10	Welding Helmet	
B10	PC Face Shield	Nomex.
B10	Balaclava / Face Hood	
B10	Cotton Hood	G FD OUS
C1 -	C6 Hearing Pr	otection
C1	Solo Light	
C1	Solo Xtreme	\mathbf{E}
C1	Ultra Solo	EMPIRAL
C2	Cap Solo	
C2	Refill	\mathbf{E}
C2	Dispenser	EMPIRAL
C3	Ultra Ear	
C3	Sync	$(\mathbf{E})_{-}$
C3	Sync Cord	EMPIRAL
C4	3M H10A	
C4	3M H9A	3M
C4	3M H9P3E	
C5	3M 1100	
C5	3M 1110	3M
C5	3M 340-4002	
C6	3M 340-4004	
C6	3M 391-1004	3M
C6	3M 391-0000	

Pg#	Category	Brand
D1-	D6 Respiratory Pr	otection
D1	Surgical Mask 75	E)
D1	3M 8210 N95	EMPIRAL
D1	3M 9010 N95	3M
D1	3M 9010V N95	0111
D2	3M 8511 N95	
D2	3M 8514 N95	
D2	3M 8247 R95	3M
D2	3M 8233 N100	
D3	3M 8822 FFP2	
D3	3M 9322+ FFP2	
D3	3M 9332+ FFP3	3M
D3	3M 8835 FFP3	
D4	3M 6200 M / 6300 L	
D4	3M 7502 M / 7503 L	3 M
D4	3M 6800 M / 6900 L	
D5	3M 6001	
D5	3M 6003	3M
D5	3M 6006	SIVI
D5	3M 2091 P100	
D6	3M 2097 P100	
D6	3M 5N11	3 M
D6	3M 501	
D6	Spirosacape EEBD (PSI)	INTERSPIRO
E1-	E17 Body Prote	ction
E1	Chief C	AMERIZA=
E1	Chief PS	

∆MERIZA=

E2 Chief C Tapes

E3

E2 Chief PS Tapes

Comfort C

Comfort PS

CONTENTS

E15 Torch Shoe Cover

Pg#	Category	Brand
E4	European - PS	(F)
E4	European - PS	EMPIRAL
E5	Safeguard PRO	(F)
E5	Safeguard C	EMPIRAL
E6	Spartan I	(F)
E6	Spartan II	EMPIRAL
E7	Labcoat	* (E) *
E7	Disposable Coverall	EMPIRAL
E 8	Proguard Type 5/6	T(S)GC
E8	Proguard Type 4/5/6	150 harrest Contact Canada bas
E9	Polo I	
E9	Polo II	<u>_(E)_</u> *
E9	Polo III	EMPIRAL
E10	Glow	3 M
E10	MultiGlow	Ê
E10	3M MultiGlow	EMPIRAL
E11	3M Radiant	3M
E11	Dazzle	· (F)
E11	Twinkle	EMPIRAL
E12	Sparkle	
E12	Bright	EMPIRAL
E12	Glitter	EMPIRAL
E13	Flare	
E13	Glitz	(E)
E13	Star	EMPIRAL
E14	Shine	E.
E14	Arctic II	EMPIRAL
E14	Bulldozer Fireman Suit	Ballidoese
E15	Torch Apron One & Two	
E15	Torch Sleeves	∆MERIZA =

Pg#	Category	Brand
E16	Torch Jacket	AMERIZA
E16	Golden Apron	
E16	Golden Sleeve	EMPIRAL.
E17	Golden Shoe Cover	
E17	Golden Jacket	ENERAL
E17	HDPE Apron	L.HITA II.
F1	-F2 Fall Protection	on
F1	Vertex	
F1	Vertex Plus	<u> AMERIZA </u>
F1	Comfort Belt	
F2	Vertex Web U	
F2	Vertex Web Y	AMERIZA
F2 F2	Vertex Rope U Vertex Rope Y	
	<u> </u>	
G1	-G20 Hand Prote	ection
G1	Gorilla Active I Regular	A .
G1	Gorilla Active II Premium	EMPIRAL BORIUA
G1	Gorilla Active III	
G2	Gorilla Flex I	A.
G2	Gorilla Flex II	EMPIRAL GORILLA
G2	Gorilla Flex Cool I	
G3	Gorilla Black I Regular	A.
G3	Gorilla Black II Premium	EMPIRAL GORILLA
G3	Gorilla White I Regular	
G4	Gorilla White II Premium	
	Gorilla Grey I Regular	E
G4	, ,	EMPIRAL PRPHIR
G4 G4	Gorilla Grey II Premium	EMPIRAL GORILLA

Gorilla Force I Regular Gorilla Force II Premium


Pg#	Category	Brand
G6	Gorilla Rock I Regular	A
G6 G6	Gorilla Rock II Premium Gorilla Defender I	EMPIRAL GORILLA
G7	Gorilla Flex Oil I	
G7 G7	Gorilla Extreme I	(F)
G7	Gorilla Extreme II	EMPIRAL GORILLA
G8	Gorilla Cut 5 PU	
G8	Gorilla Cut 5 Microfoam	Ê
G8	Gorilla Cut 5 Nitrile	EMPIRAL BORILLA
G9	Gorilla Flex Cut 4/D	
G9	Gorilla Chem I	E
G9	Gorilla Chem II	EMPIRAL GORILLA
G10	Gorilla Shield I	
G10	Gorilla Shield II	E PORTIA
G10	Gorilla Shield Lite II	DHITAMI GOHILA
G11	Gorilla Flex Chem I	E A
G11	Skydda Metal Mesh	EMPIRAL GORILLA
G11	Kong SDX2	KONG
G12	DuPont Kevlar Sleeves	DuPont'*
G12		KEVLAR
G12	Tough Guard	
G13	Driver Gloves	
G13	TIG Welding Gloves	AMERIZA
G13 G13	3602 - Freezer Gloves 3601- Freezer Gloves	
G14 G14		AMERIZA=
G14	1001R-GD/ASK-2014 1001-RD/ASK-2014 RD	
G15		A. A
G15 G15	1002-OR/1034 1005-FL/1026	<u>AMERIZA</u>
G15	1003-FL/1020	

CONTENTS

Pg#	Category	Brand
G16	1006-NT/ASK-1001	
G16	1006-YW/ASK-1001	<u> </u>
G16	1007-RD/1026	
G17	1008-GR/1034	
G17	1009-YW/1034	<u> </u>
G17	Hotmill Gloves	
G18	Blue KNDDA	
G18	Blue KNSDA	<u> </u>
G18	Drill Dotted Gloves	
G19	BW400	
G19	Cotton BW600	<u> </u>
G19	Cotton BW840	
G20	HDPE Gloves	*_(Ê)_*
		The second secon
G20	PP Sleeves	EMPIRAL.
G20 H1		ection
		ection
H1-	E4 Foot Prot	ection safetoe
H1 -	-E4 Foot Prot	ection safetoe TOP QUALITY SINCE 1844
H1 H1	-E4 Foot Proto Best Run Best Sport	ection safetoe TOP QUALITY SINCE 1944
H1 H1 H1 H1	-E4 Foot Proto Best Run Best Sport Best Jogger	ection safetoe TOP QUALITY SINCE 1844
H1- H1 H1 H1	-E4 Foot Proto Best Run Best Sport Best Jogger Best Workman	Safetoe TOP QUALITY SINCE 1844
H1- H1 H1 H1 H2 H2	-E4 Foot Prot Best Run Best Sport Best Jogger Best Workman Best Climber	Safetoe TOP QUALITY SINCE 1844
H1 H1 H1 H1 H2 H2 H2	-E4 Foot Prot Best Run Best Sport Best Jogger Best Workman Best Climber Best Boy	Safetoe TOP QUALITY SINCE 1844
H1 H1 H1 H2 H2 H2 H3	-E4 Foot Prot Best Run Best Sport Best Jogger Best Workman Best Climber Best Boy Best Slip-On	Safetoe TOP QUALITY SINCE 1884
H1 H1 H1 H2 H2 H2 H3 H3	-E4 Foot Prot Best Run Best Sport Best Jogger Best Workman Best Climber Best Boy Best Slip-On Best Worker	Safetoe TOP QUALITY SINCE 1884
H1 H1 H1 H2 H2 H2 H3 H3 H3	-E4 Foot Prot Best Run Best Sport Best Jogger Best Workman Best Climber Best Boy Best Slip-On Best Worker Best Welder	Safetoe TOP QUALITY SINCE 1884

I1-I3 Fire Protection

- I1 Flash Small
- 11 Flash Medium
- I1 Flash Large

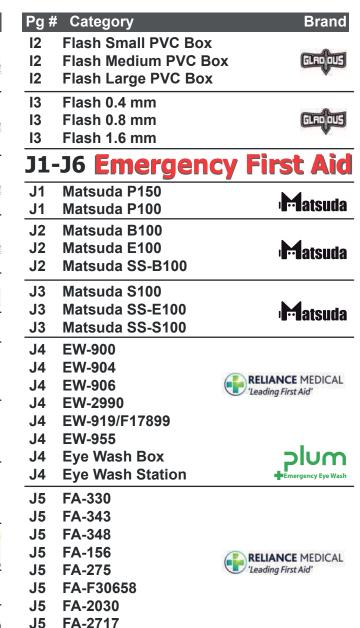

Pg#	Category	Brand
J6	FAW5 (Micro Kit)	
J6	FAW10 (Auto Kit)	
J6	FAWB25 (Team Kit)	
J6	FAG25 (Office Kit)	
J6	FAO50 (Sports Plus Kit)	
J6	FAW50 (Industry Kit)	
J6	FA100 (Workplace Kit)	
J6	Burn Kit	
K1	Gas Detector	
K1	BW C2-H H2S	
K 1	BW C3-H H2S	
K 1	BW MICRO CLIP XL	Technologies
K1	BW MAX XT II	
L1	Spill Kit	
<u></u>	Oil Spill Kit	*_(E) :
L1	Chemical Spill Kit	EMPIRAL
M1	Safety Equip	ment
M1	3M SS Cleaner & Polish	3M
M1	Scaffolding Tags	3111



The Brain Game! Use Proper Head Protection

We are in our mission to make safety affordable to everyone. Our Head Protection ranges are designed to provide maximum protection from impact and penetration hazards caused by falling objects. Consult with our PPE Experts to select the right Head Protection for based on your workplace & hazard level.

There are two categories of impact protection for hard hats: Type I and Type II. Type I hard hats are intended to reduce the force of impact resulting from a blow only to the top of the head. Type II hard hats are intended to reduce the force of lateral impact resulting from a blow that is received off-center, from the side, or to the top of the head.

In addition, there are three classifications of hard hats: G, E and C. Class G (general) hard hats offer protection against electrical hazards of up to 2,200 volts (V). Class E (electrical) hard hats provide the greatest protection for electricians, linemen and wiremen, insulating against high-voltage shock, burns and electricity up to 20,000V. Class C (conductive) hard hats are not designed to be used in electrical work. Another form of head protection is a bump hat, which provides protection in low clearance areas. Unfortunately, this type of PPE does not offer protection from falling objects or electrical hazards.



Guard

Guara		
Ventilated Helmet with Ratchet Suspension		
Standard	EN 397:2012	
Material	HDPE (High Density Polyethylene) Shell	
Suspension	4 Points Ratchet Suspension Quick ActionRatchet Wheel Universal Slot for Earmuff	
Features	Tested, Passed & Certified6 Points Ventilation to Support Air Flow	
Weight / Carton	11.86 kgs	
Carton Dimension	57.50 x 46.50 x 41 cms	
CBM / Carton	0.1096	
Packing / Carton	30 Pieces	
Origin	China	
Optional	Chin Strap	
Accessories	 Nylon Suspension 	









3M H-700R Series Unvented

3M H-700K Selles Uliveliteu		
Helmet with Ratchet Suspension		
Standard	ANSI / ISEA Z89.1-2009	
Material	HDPE (High Density Polyethylene) Shell	
Suspension	4 Points Ratchet Suspension	
Features	 Accessory Slots Replaceable Brow Pad Short Brim for Better Upward Visibility Customized Logo Options Comfortable, Tough Lightweight 	
Weight / Carton	8.70 kgs	
Carton Dimension	56 x 46 x 42 cms	
CBM / Carton	0.1082	
Packing / Carton	20 Pieces	
Origin	LISA	









3M H-801R

Full Brim Helmet with Ratchet Suspension		
Standard	ANSI / ISEA Z89.1-2009	
Class	Type 1, Class C, G & E	
Material	HDPE (High Density Polyethylene) Shell	
Suspension	 4 Points Smooth & Easy Turning Ratchet Suspension 	
Features	Offers Extra Shielding From the Sun Splashes, Rain, Sleet, Snow etcOften Preferred in Hot & Sunny Locations	
Weight / Carton	12 kgs	
Carton Dimension	56 x 46 x 42 cms	
CBM / Carton	0.1082	
Packing / Carton	20 Pieces	
Origin	USA	

MSA V-Gard Unvented

MSA V-Garu Onventeu		
Safety Helmet with Ratchet Suspension		
Standard	ANSI/ISEA Z89.1-2014, CSA Z94.1-2005	
	Type I, Class E	
Material	Virgin (HDPE) with UV Inhibitor	
Features	 Polyethylene Shell Provides Superior Impact Protection Self Adjusting Crown Straps Ensure a Comfortable Fit Fas-Trac III Suspension is the Most Comfortable 	
Weight / Carton	8.20 kgs	
Carton Dimension	57 x 47 x 42 cms	
CBM / Carton		
Packing / Carton	20 Pieces	
Origin	USA	





475359



475363





Orange 463444







Green 475362



White 475358







Vented Safet	y Helmet W/Ratchet Suspension
Standard	ANSI/ISEA Z89.1-2014, CSA Z94.1-2015

Classification Type 1 Class C Material (HDPE) High Density Polyethylene Robust Design, Durable Shell Construction Cooling Vents for Improved Air Circulation & Comfort Features • Glaregard® Surface Underbrim to Reduce Reflective Glare Extended Rain Trough for Around the brim Protection in Hot and/or Wet Environments Weight / Carton 8.42 kgs Carton Dimension 57 x 47 x 42 cms CBM / Carton 0.1125 Packing / Carton 20 pieces Origin USA



White 475369

MSA Full Brim

V-Gard Full Brim Helmet W/Ratchet Suspension		
Standard	ANSI/ISEA Z89.1-2014, CSA Z94.1-2014	
Classification	Type 1, Class E	
Material	Virgin (HDPE) with UV Inhibitor	
Features	 Polyethylene Shell Provides Superior Impact Protection Self Adjusting Crown Straps Ensure a Comfortable Fit Fas-Trac III Suspension is the Most Comfortable 	
Weight / Carton	6.90 kgs	
Carton Dimension	57 x 47 x 42 cms	
CBM / Carton	0.1125	
Packing / Carton	15 Pieces	
Origin	Shell: Mexico Ratchet: USA	







Bullard LTX Series

Dullard LTA Series		
Fire Fighting Helmet		
Standard	Certified to NFPA 1971-2013	
Suspension	4 Points Nylon Crown Straps & Crown Pad	
Shell Material	Thermoplastic	
Features	 M-Pact Shell with Smart Ridge Design High-Heat Thermoplastic Outer Shell Comfortable Sure-Lock® Ratchet Headband Nomex® Chinstrap with Quick Release Buckle & Postman's Slide Fastener Scotchlite® Reflective Markings 	
Weight / Carton	6.12 kgs	
Carton Dimension	62 x 34 x 32 cms	
CBM / Carton		
Packing / Carton	3 Pieces	
Origin	LISA	





Clip Cap

Non-Woven Clip Cap	
Standard	CE, CAT I
Material	PP Non-Woven
Style	Single Elastic
Fabric Weight	10 GSM
Color	White
Size	21 Inches
Features	 Elastic Around the Head for Secure Fit Low Linting, Soft, Light Weight & Breathable for User Comfort
Weight / Carton	2.50 kgs
Carton Dimension	45 x 20 x 34 cms
CBM / Carton	0.0306
Packing / Carton	10 Bags
Origin	China






Bump Cap

bump cup		
Safety Bump Cap		
Standard	CE, CAT I	
Size	Standard (Adjustable)	
Features	 Velcro for Fit Adjustment ABS Shell Material Thermo Formed Foam Cushioning Cotton/Polyester Material for Sweat Absorber Long Hood for Greater Usage Air Holes for Ventilation 	
Colors	Red, Navy Blue, Grey, Black	
Weight / Carton	14.80 kgs	
Carton Dimension	60 x 54 x 38 cms	
CBM / Carton	0.1231	
Packing / Carton	24 Pieces	
Origin	China	


Glasses, Goggles & Masks



Types of filter

- 2 Ultraviolet (Perception of colour can be altered)
- **2C Ultraviolet (Perception of colour is not altered)**
- 3 Ultraviolet (good discernment of colour)
- 4 Infrared
- 5 Solar
- 6 Solar + Infrared

Features applicable to the different type of protectors



Optical class

Represents the refractive index, i.e. the ability to distort the Image, due to the tolerance of the production.

There are 3 classes, from 1 to 3 with growing deviation.

Class 3 can be used only for short period of time.



EN 166 Manufacture and performance specifications

EN 169 Filters for welding and related processed

EN 170 Ultraviolet filters

EN 171 Infrared filters

EN 172 Solar filters for industrial use

EN175 Equipment that protects the face and eye during welding and related processes

EN 379 Automatic filters for welding

EN 1731 Mesh face and eye protectors





Hawk Shade 5 Welding



Hawk - Basic Plus Range

Hawk-Eye Safety Shades	
Standard	CE EN166, ANSI Z87.1
	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light Optical Class 1 Lens Low Energy Impact Resistant Wraparound with Angle Side Protection
Frame	Nylon Built in Brow Protection
Nose Piece	Universal Nose Bridge
Temple	Nylon 4-Length Positions AdjustModern Temple Design and Spatula Extendable
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	•
Carton Dimension	82 x 22.50 x 60.50 cms
CBM / Carton	
	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord



Hawk Smoke



Ryder Clear



Ryder Amber



Ryder Indoor/Outdoor Mirror



Ryder Smoke



Ryder Silver Mirror

Ryder - Basic Plus Range

Ryder - basic Flus Range		
Empe	eror's Ryders Safety Shades	
Standard	CE EN166, ANSI Z87.1	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti UV Light	
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light Snug-Fitting Wrap Around Lens Provides Perfect Impact Protection Around the Eyes Close-Fitting Unitary Front with Dual 9.75 Base Curvature Offers Wide & Unobstructed Vision 	
Nose Piece	Universal, Integral to Lens	
Temple	 Modern Temple Design & Spatula Type with Soft Insert 	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	11.50 kgs	
Carton Dimension	83 x 22 x 61 cms	
CBM / Carton	0.1114	
Packing / Carton	25 Packets (300 Pieces)	
Origin	Taiwan	
Optional	Pouch & Cord	





Edge - Basic Plus

Eage Pasie i las	
Over Spectacle	- Fits Most Prescription Glasses
Standard	CE EN166, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Full Front, Side & Top ProtectionHigh Velocity Impact ResistantAnti UV Light
Lens	 Polycarbonate Lens Filters Out More Than 99.9% of Harmful UV Light Optical Class 1 Lens Low Energy Impact Resistant
Frame	Nylon Built in Brow Protection
Nose Piece	Integral to Lens
Temple	Ventilated, Wide Spatula With Side Protection
Colour	Clear Smoke
Origin	Taiwan
Weight / Carton	19.24 kgs
Carton Dimension	87 x 36 x 23 cms
CBM / Carton	0.07203
Packing / Carton	25 Packets (300 Pieces)
Optional	Pouch & Cord



Fargo Clear Grey



Fargo Clear Orange



Fargo Indoor/Outdoor Mirror



Fargo Smoke Grey



Fargo Bronze Mirror



Fargo Silver Mirror

Fargo - Basic Plus Range

iaigo b	asic i las italige	
Far View Safey Shades		
Standard	CE EN166, ANSI Z87.1	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti UV Light	
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light One-Piece Lens, Lightweight, 22g only Dual 9.75 Base Curve Closely Fits Various Facial Contour The Lens Provides Users with Clearest & the Most Panoramic View Without Obstruction 	
Nose Piece	Universal, Integral to Lens	
Temple	 Modern Temple Design & Spatula Type with Soft TPR Insert 	
Temple Tip	Soft & non-slip rubber tips	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	11.50 kgs	
Carton Dimension	82 x 23 x 61 cms	
CBM / Carton		
	25 Packets (300 pieces)	
	Taiwan	
Optional	Pouch & Cord	



Fargo Smoke Orange

Fargo Amber









Super-Fit Blue Mirror

Super-Fit - Premium Range



Super-Fit Silver Mirror



Super-Fit Indoor/Outdoor Mirror



Super-Fit Bronze Mirror

		All Time Fit Shades
	Standard	EN166, CE, ANSI Z87.1
	Material	Polycarbonate
	Lens Coating	Anti-Scratch, Anti UV Light
	Lens	 Scratch-Resistant Polycarbonate Lens Provides 99.9% of UV Protection Full Wrap Around With 9.5 Curved Base Lens Provides Full Front & Side Eye Protection
	Frame	Lens Snapped in the Frame
	Nose Piece	Soft TPE Universal Fit
r	Temple	 Co-Moulded Unique Temple Width Adjustable & Rotatable Design for Customized Fitting
	Screw	Stainless Steel Standard Hinge Screw
	Weight / Carton	13.03 kgs
	Carton Dimension	84 x 23 x 64 cms
	CBM / Carton	0.1236
		25 Packets (300 Pieces)
	Origin	Taiwan
	Optional	Pouch & Cord



Vista Clear (Anti-Fog)



Vista Bronze

Vista Smoke (Anti-Fog)



Vista Silver Mirror



Vista Indoor / Outdoor Mirror

Vista - Premium Range

vista - Preiiliulli Kalige		
	Visionary Glasses	
Standard	CE EN166, ANSI, CE, AS and MCEPS	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti UV Light	
Lens	 Thickness 2.2 mm Optical Class 1 Polycarbonate Lens Provide 99.9% of UV protection Full Wrap Around with 8 Base Lens Provides Full Front & Side Eye Protection 	
Frame	Full Frame, Black	
Nose Piece	Soft TPR Glued on Nose Bridge	
Weight	35.50g	
Hinges	Nickle Silver 5-Barrel TypeInserted to Frame & Temples	
Temple	Black, Length (Lens-Tip): 160 mmTPE Soft Tips for Comfort	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	14.75 kgs	
Carton Dimension	83 x 31 x 59 cms	
CBM / Carton	0.1518	
Packing / Carton	25 Packets (300 Pieces)	
Origin	Taiwan	
Optional	Pouch & Cord	



Sporty Clear (Anti-Fog)



Sporty Smoke (Anti-Fog)



Sporty Blue Mirror

Sporty - Premium Range



Sporty Silver Mirror



Sporty Indoor/Outdoor Mirror



Sporty Bronze Mirror

Athletic Safety Shades	
	•
	EN166, CE, ANSI Z87.1
	Polycarbonate
Weight	28g
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 High Impact Resistance Lenses Provide 99.9% of UV Protection Full Wrap Around With 9 Curved Base Lens Provides More Coverage Without the Distraction of Seams or Traditional Type Side Shields
Frame	Brow Guard-TPE Co-MouldedSemi-Frame & Slim Temple Design
Nose Piece	Flexible Nose Bridge for Universal Fit
Temple	 Dual-Material Temples Polycarbonate Temple with Ultra-Soft TPR Tip for All Day Comfort
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	12.49 kgs
Carton Dimension	83 x 24 x 63 cms
CBM / Carton	0.1255
	25 Packets (300 Pieces)
Origin	Taiwan
	Pouch & Cord



Metallic Clear (Anti-Fog)



Metallic Bronze Mirror



Metallic Smoke (Anti-Fog)

Metallic - Premium Range

Metallic -	Premium Kange
Tough	n Metal Safety Frame Shades
Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light Streamline Dual Lens Design 9.5 Base Curved Lens
Frame	Lens Clipped to Frame
Nose Piece	 Bridge –Polycarbonate Assemble to the Frame Nose Pad- TPR Soft Nose Pad Provides Pressure-Free Fitting Flexible Nose Bridge for Universal Fit
Temple	Black Fashion Design with Thin & Comfortable Fitting
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	12.50 kgs
Carton Dimension	83 x 24 x 63 cms
CBM / Carton	
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan

Optional Pouch & Cord



Metallic Silver Mirror



Metallic Indoor / Outdoor Mirror



Active Bronze Mirror



Active Amber (Anti-Fog)



Active Clear (Anti-Fog)

Active - Premium Range



Active Smoke (Anti-Fog)



Active Silver Mirror



Active Bronze Mirror

Active - Premium Range	
Act	ively Light Safety Shades
Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Weight	Ultra Lightweight, 19g Only
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light One-Piece Lens 9.5 Base Curved Lens with Integral Extension of Side Shield Offering the Best Fit
	Rim-Less
Nose Piece	Soft Finger-Type Design
Temple	Co-MoldedNon-SlipVentilated Temple for Snug Fitting
Temple Tip	TPE Co-Molded Inserted into Temple End
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	10.80 kgs
Carton Dimension	83 x 22.50 x 62.50 cms
CBM / Carton	
	25 Packets (300 Pieces)
	Taiwan
Optional	Pouch & Cord



Elite Clear (Anti-Fog)



Elite Bronze Mirror



Elite Smoke (Anti-Fog)

Origin Taiwan

Optional Pouch & Cord

Elite - Premium Range	
Ultimate Safety & Comfort Shades	
Standard	EN166, CE, ANSI Z87.1
	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light One-Piece Lens 7 Base Curved Lens with Integral Extension of Side Shield Offering the Best Fit
Frame	 High Impact Resistant Brow-Bar Guards your Eyes from Flying Particles & Dust from Top
Nose Piece	TPR REACH Compliance Glued on Nose Bridge
Temple	Co-MoldedVented TempleNon-Slip Temple for Snug Fitting
Temple Tip	TPE Co-Molded Inserted into Temple End
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	15.09 kgs
Carton Dimension	82 x 23.50 x 63 cms
CBM / Carton	
Packing / Carton	25 Packets (300 Pieces)





Elite Indoor / Outdoor Mirror



Maxima Smoke (Anti-Fog)



Maxima Clear (Anti-Fog)



Maxima Bronze Mirror



Maxima Blue Mirror



Maxima I/O Mirror




Maxima Silver Mirror



Maxima - Premium Plus Range

Safety To Its Max	
Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 9 Base Curved Lens Filters out more than 99.9% of Harmful UV Light
Frame	 Air Vented Lens Clip in Frame Co-Injected Brow Cushion Comfort & Protects from Injury Half-Frame & Slim Temple Design
Nose Piece	Non-Slip & Ventilated Nose Piece
Temple	 In/Out & Up/Down 3 Positions Temple Adjustments Ultra-Soft TPR Tip Straight Back Temples Provide Secure Fit
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	9.86 kgs
Carton Dimension	65 x 36 x 41 cms
CBM / Carton	
Packing / Carton	10 Packets (100 Pieces)
Origin	Taiwan
Included	Pouch & Cord



Spectacle Cord



Flash Sky Red Mirror



Spectacle Pouch



ennum Plus Kange
Flashily Shades
EN166, CE, ANSI Z87.1
Polycarbonate
Anti-Scratch, Anti UV Light
 8 Base Curved Lens Filters out more than 99.9% of Harmful UV Light
Dual Lens StyleFull FrameGloss Black Color
Non-Slip & Ventilated Nose Piece
 Gloss Pearl Black Air Vented Straight Back Temples Provide Secure Fit Flexible Temples with Soft Temple Tips
Nickle Silver 5-Barrel TypeInserted to Frame & Temples
Stainless Steel Standard Hinge Screw
17.59 kgs
83 x 32 x 59 cms
0.1567
25 Packets (300 Pieces)
Taiwan

Included Pouch & Cord



Flash Smoke (Anti-Fog)



Flash Silver Mirror









Vision Clear

Optimistic Splash Eyewear	
•	ANSI Z87.1, CE EN166
Material	Polycarbonate
Style	Fits Over Prescription Glasses
Lens	 Polycarbonate Lens Protects Against Splash & Dust High Impact Resistance Against Flying Particles
Body	 Soft Vinyl Goggle Body Conforms to Facial Contours for a Very Comfortable Fit Indirect Vent with Perfect Over Ventilation Design
Nose Piece	PVC Universal Integral to Frame
Headband	Fully Adjustable Textile Elastic Band
Weight / Carton	13.90 kgs
Carton Dimension	57 x 36 x 50 cms
CBM / Carton	0.0612
Packing / Carton	12 Packets (144 Pieces)
Origin	Taiwan

Vision Grey

Cloudy Chem Eyewear	
Standard	ANSI Z87.1, CE EN166
Material	Polycarbonate
Style	 Specific Design on the Sides of Goggle Body for Fitting Over Prescription Glasses
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light
Lens	 Polycarbonate Lens Protects Against Splash & Dust High Velocity & Impact Resistance Against Flying Particles Lens Filters out more than 99.9% of Harmful UV Light
Body	 Cushion-Soft Vinyl Goggle Body & Ultra-Wide Elastic Headband for Comfortable Fitting
Nose Piece	PVC Universal Integral to Frame
Headband	Fully Adjustable Textile Elastic Band
Frame	 Translucent Frame for a Maximum Field of Vision
Weight / Carton	16.21 kgs
Carton Dimension	58 x 37 x 53 cms
CBM / Carton	0.1137
Packing / Carton	15 Packets (90 Pieces)
Origin	Taiwan

Vision Grey Visor Combo

rision erey tisor combo	
Indirect-Vented Goggle	
ANSI Z87.1, CE EN166	
Polycarbonate	
A Pivot with 4 PositionAdjustable	
Anti-Scratch, Anti-Fog & Anti UV Light	
 Polycarbonate Lens Protects Against Splash & Dust High Velocity & Impact Resistance Against Flying Particles Lens Filters out more than 99.9% of Harmful UV Light 	
 Cushion-Soft Vinyl Goggle Body & Ultra-Wide Elastic Headband for Comfortable Fitting 	
PVC Universal Integral to Frame	
Fully Adjustable Textile Elastic Band	
 Translucent Frame for a Maximum Field of Vision 	
7.50 kgs	
51 x 40 x 30 cms	
0.0612	
30 Pieces	
Taiwan	



UltraSonic Goggle

Full Vision Lab Goggles	
Standard	ANSI Z87.1, CE EN166
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light
Lens	 Single Lens Full Wraparound 6-Curved Base Lens Offers Superior Impact Protection & Coverage Single Lens Filters out more than 99.9% of Harmful UV Light
Head Band	Fully Adjustable Buckle with ClipSuitable for Elastic & Neoprene Strap
Frame	 Indirect Ventilation for Splash & Dust Resistance Co-Material Frame PP (Polypropylene) & TPE
Nose Piece	 Universal Fit Nose Bridge Conforms to Facial Contours to Ensure a Comfortable Fit
Temple	 Black/Orange Unique Temple Design with Co-Injection Temple Tips for Extra Comfort
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	10.17 kgs
Carton Dimension	52 x 41 x 50 cms
CBM / Carton	0.1066
Packing / Carton	5 Packets (50 Pieces)
Origin	Taiwan



Tactical Spoggle Clear

Tactical Spoggle

Foxy Eyewear	
Standard	ANSI Z87.1, CE EN166
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light
Lens	 Single Lens Full Wraparound 8-Curved Base Lens Offers Superior Impact Protection & Coverage Single Lens Filters out more than 99.9% of Harmful UV Light
Sponge	EVA Foam Soft Cushion, Fire Retardant
Frame	Black, Nylon Foam Padded Frame for Dust ProtectionDirect Ventilation
Nose Piece	Nylon with CR Foam UniversalIntegral to Frame
Temple	 Black/orange, Interchangeable Temples & Headband Type Unique Temple Design with Co-Injection Temple Tips for Extra Comfort
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	22.50 kgs
Carton Dimension	84 x 31 x 58.5 cms
CBM / Carton	
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan



Included Pouch & Cord

RX Ultra Goggle Clear

C	Corrective Eye Goggles	
Standard	ANSI Z87.1, CE EN166	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light	
Lens	 9 Base Curved Lens Filters out more than 99.9% of Harmful UV Light Removable RX Insert Included - To Fit Prescription Lenses (less than - 4.0 Diopter) 	
Frame	 Black, Nylon Foam Padded Frame for Dust Protection Lens and Frame Vented to Increase Air Flow 	
Nose Piece	Nylon with CR Foam UniversalIntegral to Frame	
Temple	 Black, Interchangeable Temples & Headband Type Ultra-Soft TPR Tip Air Vented Straight Back Temples Provide Secure Fit 	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	12.60 kgs	
Carton Dimension	63 x 37 x 37 cms	
CBM / Carton	0.0862	
	10 Packets (120 Pieces)	
Origin	Taiwan	



Virtua AP Series

VII Caa Ai	Scries
	Smart Fit
Standard	ANSI/ISEA Z87.1-2010, CAN/CSA Z94.3-2007
Material	Polycarbonate
Lens Coating	Hard Coat Lens
Lens	Impact Resistant Polycarbonate Lens with 99.9% UV Protection
Features	 Frameless Design Unisex Styling A Selection of "Task-Specific" Lens Tints Comfortable, Lightweight Frame Weight Less than 1 oz High-Wrap Lenses Fit Snug Against the Face for a Better Viewing Area Polycarbonate Lenses Absorb 99.9% UV Rays
Applications	In Civil ConstructionChemical IndustriesPetrochemicalMining & Industries in General
Weight / Carton	0.73 kgs
Carton Dimension	37 x 17 x 15.5 cms
CBM / Carton	0.0098
Packing / Carton	
Origin	Taiwan



3M Linte Cinza Trans

Virtua Lente Cinza

Slim Fit		
Standard	ANSI Z87.1:2003	
Material	Polycarbonate	
Lens	 Impact Resistant Polycarbonate Lens with 99.9% UV Protection 	
Frame	Frameless Design	
Features	Integrated Nose BridgeHighly Flexible Single Lens DesignLight Weight	
Temple	Lens Colored Spatula Type Temple	
Applications	In Civil ConstructionChemical IndustriesPetrochemicalMining & Industries in General	
Weight / Carton	0.845 kgs	
Carton Dimension	20 x 29.5 x 20.5 cms	
CBM / Carton	0.0121	
Packing / Carton	25 Pieces	
Origin	Taiwan	

3M



3M 2890SA

Broad View		
Standard	EN 166: 2001 / EN 170: 2002 / CE 230.1	
Material	Polycarbonate	
Lens Coating	Anti-Fog	
Lens	Impact Resistant Acetate Lens with UV Protection	
Features	 Optical Clarity Class 1 to Allow Prolonged Comfortable Wear Sealed Design Helps Provide Protection Against Liquids, Dust, Gases & Vapours Acetate Lens for Excellent Chemical Resistance Reliable Protection Against Specified Levels of Hazardous UV Radiation Vented Design for Improved Air Circulation Comfort & Reduced Fogging in Hot or Humid Conditions 	
Weight / Carton	1.54 kgs	
Carton Dimension	30 x 20 x 25 cms	
CBM / Carton	0.015	
Packing / Carton	10 Pieces	
Origin	Taiwan	







DuPont™



Welding Helmet

Welding Heimet		
Welding Helmet with Ratchet Fitting		
Shell Material	ABS	
Features	 Light Weight Comfortable Lift Up Front Lens Protects Upper Chest & Throat from Sparks & Spatter Adjustable Ratchet Suspension Curved Top Extends Well Over the Head for Added Protection 	
Weight / Carton	16 kgs	
Carton Dimension	50 x 46 x 53 cms	
CBM / Carton	0.1219	
Packing / Carton	30 Pieces	
Origin	Taiwan	

PC Face Shield

PC race s	/IIICIU	
Visor with Ratchet Head Gear		
Material	Polycarbonate	
Features	 Adjustable Ratchet Type Provides Face Protection Against Liquid splashes Flying Objects, grinding Chips etc Light Weight-Visor Gives High Impact Resistance 	
Weight / Carton	16 kgs	
Packing / Carton	40 Pieces	
Origin	China	

Balaclava / Face Hood

Fireman Balaclava		
Standard	BS EN 13911:2004	
Features	 Nomex® IIIA Comfortable Knitted Fabric 200-210 g/m2 Single Layer Double Layers Customized Solution Available 	
Colors	Natural Black	
Weight / Carton	10.50 kgs	
Carton Dimension	71 x 41 x 25 cms	
CBM / Carton	0.0727	
Packing / Carton	100 Pieces	
Origin	Pakistan	

Cotton Hood

100% Cotton Face Cover		
Standard	CE CAT I	
Material	Cotton	
Features	Protect From Sun & Dust	
Colors	Petrol BlueKhaki	
Weight / Carton	13 kgs	
Carton Dimension	50 x 39 x 26 cms	
CBM / Carton	0.0507	
Packing / Carton	100 Pieces	
Origin	China	

EN 352-2 Earplugs

EN 352-3 Headphones fitted on an industrial protection helmet

EN 352-4 Headphones to suit specific ambient noise levels

EN 352-5 Headphones with noise reduction active control

EN 352-6 Headphones audio communications capability

EN 352-7 Inserts that attenuate sound to suit specific ambient noise levels

Noise damping

It is the difference between the intensity of the "noise" to which the operator is exposed and that actually transmitted to the ear. The damping level is expressed in the following manners:

HML: this indicates the damping level based on the frequency of the noise: High (H), Medium (M), Low (L) frequency. The damping values are expressed through a number preceded by a letter of the frequency to which it refers. SNR: (Simplified Noise Reduction): it expresses the damping level of the protector through a single value

PPE and daily exposure level

According to art. 193 D.Lgs 81/08, if the operator is exposed daily to:

- > 80 dBA the employer provides the workers with hearing PPE
- > 85 dBA the employer demands the workers to use hearing PPE

The employer takes into account the attenuation provided by the personal protection devices worn by workers to assess the efficiency of PPE and compliance with maximum values of noise exposure [87 dB(A)] Workers exposed to levels exceeding 80 dB (A) receive proper training and practical instruction (art. 195).





EPA Regulation

Frequency Sounds

Low Frequency Noise

Automotive Construction

Textile Manufacturing

Cement Manufacturing

Foundry, Steelworks

Metal Processing

Spacer & Cup

ANSI S3.19-1974. ANSI S12.6-1997

Black Cup & Red Hoop with Soft Foam

Filled with Cushion for All Day Comfort

Combination of Specially Designed

Helps to Provide Excellent Protection

Chemical & Pharmaceutical Manufacturing

Printing, Wood Working, Heavy Engineering

Designed for High Noise Environment & Low

Standard EN 352-1:2002

Features

Applications





HD Universal Headband Stainless Steel Type Earmuff



Solo Xtreme

١		64	_	oa	
۹	А			റാ	100
1	u			υa	

am	Univ
----	------

Universal Headband Type Earmuff with Soft Foam		
Standar	EPA Regulation EN 352-1:2002 ANSI S3.19-1974, ANSI S12.6-1997	

<u>Features</u>

 Black Cup & Red Hoop with Soft Foam Filled with Cushion for All Day Comfort Designed for High Noise Environment & Low Frequency Sounds

Combination of Specially Designed Spacer & Cup

 Helps to Provide Excellent Protection Low Frequency Noise

Applications

- Metal Processing Automotive Construction
- Textile Manufacturing
- Chemical & Pharmaceutical Manufacturing

Cement Manufacturing

Printing, Wood Working, Heavy Engineering

Foundry, Steelworks

Mining & Quarrying

	Cai

SNR 33dB NRR 29dB Weight / Carton 8.69 kgs

ton Dimension 51 x 42 x 43 cms

CBM / Carton 0.092 Packing / Carton 20 Pieces Origin Taiwan

EPA Regulation Standard EN 352-1:2002 ANSI S3.19-1974, ANSI S12.6-1997 Black Cup & Red Hoop with Soft Foam Filled with Cushion for All Day Comfort Designed for High Noise Environment & Low Frequency Sounds **Features** Combination of Specially Designed Spacer & Cup Helps to Provide Excellent Protection Low Frequency Noise Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing **Applications** Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying SNR 32dB NRR 28dB

Weight / Carton 12.00 kgs

CBM / Carton 0.0882

Packing / Carton 20 Pieces

Carton Dimension 50 x 41 x 43 cms

Origin Taiwan

Mining & Quarrying SNR 32dB NRR 26dB Weight / Carton 7.11 kgs Carton Dimension 50 x 41 x 43 cms CBM / Carton 0.088

Packing / Carton 20 Pieces

Origin Taiwan













Refill

Universal Cap Mounted Stainless Steel Type Earmuff		
Standard	EN352-1-2002 ANSI S3.19-1974 ANSI S12.6-1997	
Features	 Black Cup & Red Hoop with Soft Foam Filled with Cushion for All Day Comfort Designed for High Noise Environment & Low Frequency Sounds Combination of Specially Designed Spacer & Cup Helps to Provide Excellent Protection Low Frequency Noise 	
Applications	 Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying 	
SNR	28dB	
NRR	26dB	
Weight / Carton	-	
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	Taiwan	


Disposable Unco	rded PU Ear	plug Refill Pack
-----------------	-------------	------------------

Disposable	officeraca i o Earping North i dok
	EN 352-2:2002 ANSI S3.19-1974 ANSI S12.6-1997
Material	Polyurethane
Features	 Orange, Soft Hypoallergenic PU Foam Plug Tapered Design for Easy Insertion & Removal Gently Expands & Self Adjusts to all Size Ear Canals Offers Excellent Noise Reduction Provides Comfortable Seal Without Pressure Smooth, Dirt-Resistant Surface for Hygiene
Applications	 Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying
SNR	37dB
	32dB
Weight / Carton	8 kgs
Carton Dimension	40 x 39 x 32 cms
CBM / Carton	
	10 Bags (5000 Pairs)
Origin	Taiwan

Dispenser

Dispenser		
Unc	orded Ear Plug Dispenser	
Standard	CE, CAT I	
Material	ABS Plastic	
Features	 Accurately Dispenses One Earplug at a Time Dispenses Earplug Directly into Hand Durable ABS Plastic for Tough Environment Free-Standing or Wall-Mounted Shields Earplug from Wind & Rain Impact Resistant Temperature Tolerance & Smooth Operation 	
Applications	 Facility Maintenance Grinding Electrical Machine Operation Sanding Welding Painting Blasting Assembly Cleaning 	
Weight / Carton	6 kgs	
Carton Dimension	69 x 49 x 36 cms	
CBM / Carton		
Packing / Carton		
Origin	Taiwan	



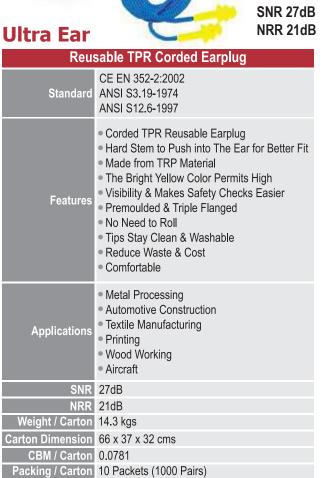

Origin Taiwan



-	
Disposal	ole PU Ear Plug (Without Cord)
	EN 352-2:2002 ANSI S3.19-1974 ANSI S12.6-1997
Material	Polyurethane
Features	 Soft Polyurethane Foam Ear Plugs Providing Extra Comfort The Tapered Shaped Is Designed to Fit Most Ear Canals Made from Soft Hypo-Allergenic Material The Bright Orange Color Permits High Visibility & Makes Safety Checks Easier
Applications	 Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying
SNR	37dB
NRR	32dB
Weight / Carton	5.80 kgs
Carton Dimension	67 x 29 x 39 cms
CBM / Carton	
Packing / Carton	,
Origin	Taiwan



Sylic Cord		
Dispo	sable PU Ear Plug (Corded)	
Standard	EN 352-2:2002 ANSI S3.19-1974 ANSI S12.6-1997	
Material	Polyurethane	
Features	 Soft Polyurethane Foam Ear Plugs Providing Extra Comfort The Tapered Shaped Is Designed to Fit Most Ear Canals Made from Soft Hypo-Allergenic Material The Bright Orange Color Permits High Visibility & Makes Safety Checks Easier 	
Applications	 Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying 	
SNR	37dB	
NRR	32dB	
Weight / Carton	5.80 kgs	
Carton Dimension		
CBM / Carton		
	10 Packets (1000 Pairs)	
Origin	Taiwan	



3M

SNR 35dB NRR 30dB

3M	H10A	NRR
	3M™ PELTOR™ Optime™ 105	Farmuffs

3M™ PELTOR™ Optime™ 105 Earmuffs		
Standard	ANSI S3.19 - 1974	
Material	ABS	
Features	 Over-The-Head Earmuff Double-Shell Technology to Provide Effective Hearing Protection Proprietary Twin-Cup™ Design Stainless Steel Headband for Consistent Force & Effective Hearing Protection Earcup Pivot Points That Tilt for Optimum Comfort & Efficiency Liquid/Foam Filled Earmuff Cushions Color-Coding for Compliance Sighting 	
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft 	
SNR	35dB	
NRR	30dB	
Weight / Carton	3.8 kgs	
Carton Dimension	72 x 24 x 22 cms	
CBM / Carton		
Packing / Carton		
Origin	USA	



3М™ РЕ	LTOR™ Optime™ 98 Earmuffs
Standard	ANSI S3.19 - 1974
Material	ABS
Features	 Versatile Over The Head Earmuff Stainless Steel Headband for Consistent Force & Effective Hearing Protection Earcup Pivot Points That Tilt for Optimum Comfort & Efficiency Ultra Light Liquid/Foam Filled Earmuff Cushions Color-Coding for Compliance Sighting
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft
SNR	30dB
NRR	25dB
Weight / Carton	3 kgs
Carton Dimension	49 x 27 x 20 cms
CBM / Carton	
Packing / Carton	10 Pieces
Origin	USA



SITI IISI SE		
3M™ Peltor™	^и Optime™ 98 Cap-Mount Earmuffs	
Standard	ANSI S3.19 - 1974	
Material	ABS	
Features	 Cap-Mount Earmuff Earcup Pivot Points That Tilt for Optimum Comfort & Efficiency Ultra Light Weight Liquid/Foam Filled Earmuff Cushions Color-coding for Compliance Sighting 	
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft 	
SNR	28dB	
NRR	23dB	
Weight / Carton	3.3 kgs	
Carton Dimension	49 x 27 x 20 cms	
CBM / Carton	0.0265	
Packing / Carton		
Origin	USA	





3M 1100	NRR 29dB
3M™ PU	Foam Earplugs 1100, Uncorded
Standard	Class AL CSA Z94.2 - 1994 ANSI S3.19 - 1974
Features	 Soft Hypoallergenic PU Foam Offers Maximum Wearer Comfort Tapered Design to Fit Comfortably in the Ear Canal Smooth & Dirt Resistant Surface for Hygiene
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft
SNR	34dB
NRR	29dB
Weight / Carton	1.72 kgs
Carton Dimension	55 x 22 x 23 cms
CBM / Carton	0.0278
Packing / Carton	5 Packets (1000 Pairs)
Origin	Brazil

CSA Class - AL AS/NZS 1269 : 2005 Class - 3 / SLC 80 Rating CSA Z94.2 - 1994 EN 352 - 2 Soft Hypoallergenic PU Foam Offers Maximum Wearer Comfort Tapered Design to Fit Comfortably in the Ear Canal Smooth & Dirt Resistant Surface for Hygiene, With Polyester Cord Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft SNR 34dB NRR 29dB Weight / Carton Carton Dimension CBM / Carton Packing / Carton Origin Brazil	3M™ PU	J Foam Earplugs 1110, Corded
• Maximum Wearer Comfort • Tapered Design to Fit Comfortably in the Ear Canal • Smooth & Dirt Resistant Surface • for Hygiene, With Polyester Cord • Metal Processing • Automotive Construction • Textile Manufacturing • Printing • Wood Working • Aircraft SNR SNR SNR Weight / Carton Carton Dimension CBM / Carton Packing / Carton Packing / Carton	Standard	AS/NZS 1269 : 2005 Class - 3 / SLC 80 Rating CSA Z94.2 - 1994
Applications Automotive Construction Textile Manufacturing Printing Wood Working Aircraft SNR 34dB NRR 29dB Weight / Carton 1.41 kgs Carton Dimension CBM / Carton Packing / Carton Packing / Carton Textile Manufacturing Printing Vood Working NRR Aircraft 34dB 29dB 0.0259 5 x 20 x 23.5 cms 0.0259 5 Packets (500 Pairs)	Features	 Maximum Wearer Comfort Tapered Design to Fit Comfortably in the Ear Canal Smooth & Dirt Resistant Surface
NRR 29dB Weight / Carton 1.41 kgs Carton Dimension 55 x 20 x 23.5 cms CBM / Carton 0.0259 Packing / Carton 5 Packets (500 Pairs)	Applications	Automotive ConstructionTextile ManufacturingPrintingWood Working
Weight / Carton 1.41 kgs Carton Dimension 55 x 20 x 23.5 cms CBM / Carton 0.0259 Packing / Carton 5 Packets (500 Pairs)	SNR	34dB
Carton Dimension 55 x 20 x 23.5 cms CBM / Carton 0.0259 Packing / Carton 5 Packets (500 Pairs)		
CBM / Carton 0.0259 Packing / Carton 5 Packets (500 Pairs)		-
Packing / Carton 5 Packets (500 Pairs)		
Origin Brazil		
	Origin	Brazil



3M™ E-A-R™ I	JltraFit™ Earplugs 340-4002, Corded
Standard	ANSI S3.19 - 1974 CSA Class AL
Features	 Premoulded Patented Triple-Flange Design That Fits Comfortably in Most Ear Canals Made with Durable Elastomeric Polymer Washable Reusable & With Carry Case Push-To-Fit Style for Easy & Hygienic Fit
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft
SNR	30dB
NRR	25dB
Weight / Carton	2.91 kgs
Carton Dimension	54 x 22 x 25 cms
CBM / Carton	
	4 Packets (200 Pairs)
Origin	USA





SNR 37dB NRR 33dB

3M

SNR 30dB 3M 391-0000 NRR 25dB

3M™ E-A-R™ (UltraFit™ Earplugs 340-4004, Corded
Standard	ANSI S.3.19-1974
Features	 Premoulded Patented Triple-Flange Design That Fits Comfortably in Most Ear Canals Made with Durable Elastomeric Polymer Washable Reusable Push-To-Fit Style for Easy & Hygienic Fit
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft
SNR	30dB
NRR	25dB
Weight / Carton	2.50 kgs
Carton Dimension	54 x 22 x 26 cms
CBM / Carton	
Packing / Carton	4 Packets (400 Pairs)
Origin	USA

3M™ E-A-Rsoft	™ Yellow Neons™ One Touch™ Refill
Standard	ANSI S.3.19-1974
Features	 Seals the Earcanal with Soft Slow-Recovery Foam for Excellent Noise Reduction & Comfort Easy to Roll Down & Insert Expands Within the Ear canal for a Comfortable, Secure Fit No packaging waste with Each Pair
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft
SNR	37dB
NRR	33dB
Weight / Carton	4 kgs
Carton Dimension	
CBM / Carton	
	4 Bottles (2000 Pairs)
Origin	USA

3M™ E-A-R™ One Touch™ Pro Earplug Dispenser		
Standard	CE Approved	
Features	 Accurately Dispenses One Earplug at a Time Dispenses Earplug Directly into Hand Durable ABS Plastic for Tough Environments Free-Standing or Wall-Mounted Shields Earplugs from Wind & Rain Mounting Holes Designed to Fit a Variety of Competitive Dispensers 	
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft 	
SNR	30dB	
NRR	25dB	
Weight / Carton	3.50 kgs	
Carton Dimension	55 x 26 x 23 cms	
CBM / Carton		
Packing / Carton		
Origin	USA	

Breathing Apparatus Dust filtering face masks EN 149 EN 140 Semi and quarter masks **EN 136 Full masks** Anti-gas and/or dust filtering semi masks with valves **EN 405 EN 143 Dust filters** EN 14387 Anti-gas and combined filters **Dust Filtering Face Masks** x = Classes of pertinence v = Durationz = Resistance to clogging 1 = Low efficiency R = ReusableD = Dolomite 2 = Medium efficiency NR = Non reusable, only for one shift F P X у Z 3 = High efficiency **Protection Type** FFP1 Suitable for use in the presence of: iron, rust, concrete, stone, filling materials. Restrictions: not suitable for filtering cancerogenous particles or radio-active substances. microorganisms (virus, bacteria, fungi and spore) and enzymes. FFP2 Suitable for use in the presence of: wood, steel, cement, paint, spray paint and anti-rust, fibreglass and mineral fiber, welding fumes, zinc, pesticides in water solution, flour, mould and spore, bacteria, soot, Restrictions: not suitable for filtering particles of radioactive substances, virus and enzymes. FFP3 Suitable for use in the presence of stainless steel, anti-vegetative paint, asbestos, tuberculosis bacteria. **Anti-Gas Filters Classes of anti-gas filters** The filters are classified according to the absorption capacity, in other words the amount contaminant that the filter can absorb: Class Capacity small medium large **Protection Type** Organic gas and vapours with boiling point above 65°C Α В In organic gas and vapours E Sulfur dioxide and other acid gas and vapours K **Ammonia and by-products** Organic gas and vapours with boiling point lower or equal to 65°C AX SX Gas and vapours specifically indicated from manufacturer HgP3 **Mercury vapours** NOP3 **Nitrogenated fumes** Dust





Surgical Mask 75

PP-NON	Woven 3 Ply Mask
Standard	EN CAT 1
	Sky Blue
Weight	75 GSM
Size	17.50 cm x 9.50 cm
Features	 3 Ply Mask With Ear Loops Melt Blown Filter Very Low Resistance to Breathing High Filtration Capacity Soft Latex Free Elastic Loops Adjustable Nose Clip Embedded Comfortable to Wear Perfect Fit
Applications	MedicalDentalOccupationalConstructionPaintAllergies
Weight / Carton	6.80 kgs
Carton Dimension	52 x 31.50 x 38.50 cms
CBM / Carton	0.0631
Packing / Carton	40 Packets (2000 Pieces)
Origin	China



3M™ 8210 N95

3M''' 821	U N95
Disposable	Particulate Respirator
Standard	NIOSH Approved
Features	 Cup Shaped Design With Welded Strap Attachment NIOSH Approved for At Least 95 Percent Filtration Efficiency Against Certain Non-Oil Based Particles Cushioning Nose Foam & Adjustable Nose Clip Helps Provide A Custom Fit & Secure Seal Lightweight Design to Increase Work & Wear Time Advanced Electrostatic Media Is Designed for Ease of Breathing
Applications	 Commercial Buildings Construction Design & Construction Food Processing Food Safety General Manufacturing Heavy Infrastructure
Weight / Carton	2.50 kgs
Carton Dimension	52 x 30 x 22 cms
CBM / Carton	
Packing / Carton	8 Packets (160 Pieces)

Origin USA



3M™ 9010 N95

Disposable Particulate Respirator

Disposable i	Particulate Respirator
Standard	NIOSH Approved
Features	 Vertical Flat Fold Design For Non-Oil Based Particles Adjustable Nose Clip Helps Provide a Custom Fit & Secure Seal Lightweight Design to Increase Work & Wear Time Advanced Electrostatic Media Is Designed for Ease of Breathing
Applications	 Commercial Buildings Constructio Design & Construction Food Processing Food Safety General Manufacturin Heavy Infrastructure Mining, Oil & Gas
Weight / Carton	6.50 kgs
Carton Dimension	67 x 30 x 30 cms
CBM / Carton	
Packing / Carton	10 Packets (500 Pieces)
Origin	China



3M™ 9010V N95

Disposable Particulate Respirator	
Standard	NIOSH Approved
Features	 3M™ Cool Flow™ Exhalation Valve Reduces Heat Build-up Inside the Respirator Two Strap Design With a Comfortable Nose Clip & Advanced Electret Media Help Make Breathing Easier & Cooler Adjustable Noseclip Helps Reduce Potential for Eyewear Fogging & Ensure a Better Seal & Fit Each Respirator is Individually Packaged to Offer Convenient Storage & Portability
Applications	Commercial BuildingsConstructionDesign & ConstructionFood Processing
Weight / Carton	5.10 kgs
Carton Dimension	67 x 30 x 30 cms
CBM / Carton	
	10 Packets (200 Pieces)
Origin	China



3M™ 8511 N95

Disposable Particulate Respirator

Standard NIOSH Approved Ideally Suited for Hot/Dusty Work Settings that Require Long Periods of Wear

> At Least 95 Percent Filtration Efficiency Against Certain Non-Oil Based Particles 3M™ Cool Flow™ Exhalation

Features

- Valve Reduces Heat Build-Up Inside the Respirator
- Braided Headbands
- Spacious & Durable
- Designed to Increase Comfort & Wearability
- Advanced Electret Media Designed for Ease of Breathing

Applications

- Agricultural
- Commercial Buildings
- General Manufacturing
- Heavy Infrastructure
- Industrial Maintenance
- Mining, Oil & Gas

Weight / Carton 2.34 kgs

Carton Dimension 52 x 33 x 23 cms

CBM / Carton 0.0395

Packing / Carton 8 Packets (80 Pieces)

Origin USA

3M



3M 8514 N95

Features

Disposable Particulate Respirator

Standard NIOSH Approved

 Used in Certain Applications Involving Metal Fumes Flame Resistant Per

Modified ASTM D2859 Carbon Filter Layer Reduces Exposure to

Nuisance Level Odors ■ 3M™ Cool Flow™ Exhalation Valve Reduces Heat Build-up Inside the

Respirator Soft Nose Foam Adjustable

Noseclip & Straps

Applications

- Agricultural
- General Manufacturing
- Mining
- Oil & Gas
- Transportation

Weight / Carton 4.33 kgs

Carton Dimension 52 x 40 x 28 cms CBM / Carton 0.0582

Packing / Carton 8 Packets (80 Pieces) Origin USA



3M 8247 R95

Features

Disposable Particulate Respirator

Standard NIOSH Approved Carbon Layer Helps Reduce Nuisance Levels of Organic Vapors

- Collapse Resistant Shell
- Adjustable Noseclip Helps Provide a Custom Secure Seal
- Advanced Electrostatic Media - With Highly Charged Microfibers to Enhance the Capture of Airborne Particles While Allowing you to Breathe Easier

Applications • Mining

- General Manufacturing
- Oil & Gas

Agricultural

Transportation

Weight / Carton 2.70 kgs

Carton Dimension 40 x 28 x 26 cms CBM / Carton 0.03

Packing / Carton 6 Packets (120 Pieces)

Origin USA



3M 8233 N100

Disposable Particulate Respirator Standard NIOSH Approved NIOSH's Highest Rated Filtration Efficiency in a Disposable Respirator N100 3M™ Cool Flow™ Exhalation Valve Reduces Heat Build-Up Inside the Respirator Compatible With a Variety **Features** Of Protective Evewear & Hearing Protection Adjustable Noseclip Helps Provide a Custom Secure Seal Individually Packaged Advanced Electret Media is Designed for Ease of Breathing General Manufacturing Marine Applications • Mining Oil & Gas Transportation Weight / Carton 12.75 kgs Carton Dimension 52 x 30 x 22 cms

CBM / Carton 0.0343

Packing / Carton 1 Packet (20 Pieces)

Origin USA



3M™ 8822 FFP2

Disposable Particulate Respirator

Standard AS/NZ 1716:2012 Lightweight Construction **Promotes Greater Comfort** & Contributes to Increased Wear Time The Cupped Shape, Twin

Strap Design Adjustable Steel Nose Clip Provides a Custom Fit With Fewer Pressure Points & a Secure Face Seal

Features Patented One-Way Valve Offers Easy Exhalation & Cooler, Drier Comfort for Use Against Both Mechanically Generated Particulates & Thermally Generated Fumes & Smokes

All Filter Design Provides **Economical Protection** With No Cleaning Required

Foundries, Light Welding **Applications** Furnaces, Leadwork

Weight / Carton 6 kgs Carton Dimension 56 x 43 x 26 cms CBM / Carton 0.0558 Packing / Carton 24 Packets (240 Pieces) Origin UK



3M™ 9322+ FFP2

Disposable Particulate Respirator

Standard AS/NZS 1716:2012 Foldable, Easy To Store, 3-panel Design Embedded Nose Clip is Concealed & is Metal Detectable Nose Clip is Kept Securely in Place Within the Layers of the

> Respirator 3M Low Breathing **Features** Resistance Filter **Technology Gives** Effective Filtration

Embossed Top Panel of The Respirator Helps to Reduce Fogging of Evewear

3M™ Cool Flow™ **Exhalation Valve Offers** Improved Comfort in Hot **Humid Environments**

Construction, Manufacture **Applications** Pharmaceutical

Weight / Carton 3.30 kgs Carton Dimension 49 x 26.50 x 43 cms CBM / Carton 0.0558 Packing / Carton 12 Packets (120 Pieces) Origin UK



3M™ 9332+ FFP3

Disposable Particulate Respirator

Standard 149:2001+A1:2009

 Foldable, Easy To Store, Proprietary 3-panel Design Accommodates Facial Movement for Wearer Comfort Low Breathing Resistance

Filter Technology Gives Effective Filtration for Consistent High Quality Performance

Features Innovative Chin Tab Designed for Ease of Donning & Adjustment To Help Achieve a Comfortable Fit ■3M™ Cool Flow™

Exhalation Valve Offers Improved Comfort in Hot Humid Environments & / or Where Work is Hard & Physical

Construction, Manufacture **Applications** Pharmaceutical

Weight / Carton 3.30 kgs Carton Dimension 49 x 26.50 x 43 cms CBM / Carton 0.0558 Packing / Carton 12 Packets (120 Pieces) Origin UK

3M™ 8835 FFP3

Disposable Particulate Respirator

Standard EN 149:2001+A1:2009 Soft Inner Ring Improves Face Seal. Wearer Comfort Robust Shell & Cup Design Provides

> Multi-shift Capability 4 Point Adjustable Braided Headbands Help Achieve a More Secure Feel

 3M™ Advance Flectret Filter Material Gives Effective Filtration With Low Breathing Resistance for Consistent High Quality Performance

 3M™ Cool Flow™ **Exhalation Valve Offers** Improved Comfort in Hot **Humid Environments**

 Adjustable Buckle Straps Lightweight, off-the-face Design

Applications

Features

 Construction Metal Processing

Weight / Carton **Carton Dimension** CBM / Carton 0.06

3 kgs 62 x 39 x 23 cms

Packing / Carton 10 Packets (50 Pieces)

Origin UK



(TPR) Reusable Half Face Mask Respirator		
Standard	NIOSH / EN 140:1998	
Features	 This Series Combines Comfort & Convenience Comfortable Soft, Lightweight Face-piece With Easy-to-Adjust Head Straps NIOSH Approved For Negative Pressure Air Purifying & Supplied Air Dual Airline Applications Can Be Disassembled, Cleaned & Reused Replaceable Cartridges & Filters Allow Reuse of Face-piece for Cost Savings 	
Applications	 Construction Design & Construction General Manufacturing Heavy Infrastructure Industrial Maintenance Marine 	

Mining Oil & Gas Transportation

Origin USA / Poland

Weight / Carton 3.40 kgs Carton Dimension 56 x 41.50 x 13.50 CBM / Carton 0.0314

Packing / Carton 24 Pieces



3M™ 7502 M / 3M™ 7503 L

Silicone Half Face Mask Respirator		
Standard	NIOSH / EN 140:1998	
Features	 Advance Silicone Material for Increased Comfort & Greater Durability Proprietary 3M™ Cool Flow™ Valve Helps Makes Breathing Easier Dual-mode Head Harness Adjusts Easily for Either Standard or Drop-down Mode Exhalation Valve Cover Directs Exhaled Breath & Moisture Downward to Reduce Fogging 	
Applications	 Construction Food & Beverage Manufacturing General Manufacturing Heavy Industrial Manufacturing Marine & Oil & Gas Pharmaceutical 	
Weight / Carton	3 kgs	
Carton Dimension	45 x 31 x 16 cms	
CBM / Carton		
Packing / Carton		
Origin	USA	



3M™ 6800 M / 3M™ 6900 L

Silicone/T	PE Full Face Mask Respirator
Standard	NIOSH OSHA EN-136:1998 CLASS 1
Features	 Large Lens Provides a Wide Field of View for Excellent Visibility Lightweight Well-balanced Design & Silicone Face Seal for Enhanced Comfort, Durability & Ease of Cleaning Available in Air-purifying & Supplied Air Respirator Modes Center Adapter Directs Exhaled Breath Downward 3M Cool Flow™ Valve Makes Breathing Easier To Provide Cool, Dry Comfort
Applications	ConstructionDesign & ConstructionFood & Beverage ManufacturingGeneral ManufacturingHeavy Industrial
Weight / Carton	3 kgs
Carton Dimension	41 x 31 27 cms
CBM / Carton	0.0343

Packing / Carton 4 Pieces

Origin USA

3M



3M™ 6001

314 000	
Organic	Vapor Cartridge
Standard	NIOSH / CSA Z94.4 OSHA 29 / CFR 1910.134
Features	 NIOSH Approved for Protection Against Certain Organic Vapors Swept-Back Design Allows An Enhanced Field of View & Comfort Bayonet Compatibility Allows Use With Many 3M Half & Full Face-piece Designs
Applications	ConstructionDesign & ConstructionFacility SanitationFood ProcessingFood Safety
Weight / Carton	6.30 kgs
Carton Dimension	52 x 24 x 20 cms
CBM / Carton	0.025

Packing / Carton 30 Sets

Origin USA

3M



3M™ 6003

Organic Vapor / acid Gas Cartridge

n racia cas cartilage
NIOSH / CSA Z94.4 OSHA 29 / CFR 1910.134
 NIOSH Approved for Protection Against Certain Organic Vapors or Acid Gases Swept-back Design Allows An Enhanced Field of View & Comfort Bayonet Compatibility Allows Use With Many 3M Half & Full Face-piece Designs
Facility SanitationFood ProcessingFood SafetyGeneral ManufacturingOil & Gas
6.50 kgs
52 x 24 x 21 cms
0.0262
30 Sets
USA

3M



3M™ 6006

Universal Gas & Vapour Cartridge

Standard	NIOSH / CSA Z94.4 OSHA 29 / CFR 1910.134
Features	 Niosh Approved for Protection Against Certain Organic Vapors, Acid Gases Ammonia, Methylamine & Formaldehyde Swept-back Design Allows An Enhanced Field of View & Comfort Bayonet Compatibility Allows Use With Many 3M Half & Full Face-piece Designs
Applications	Facility Sanitation,General ManufacturingMining, Oil & Gas,
Weight / Carton	7.40 kgs
Carton Dimension	52 x 24 x 21 cms
CBM / Carton	0.0262
Packing / Carton	30 Sets
Origin	USA

3M



3M™ 2091 P100

3M™ 2091 P100			
Particulate Filter			
Standard	NIOSH / A 120311		
Features	 Exceptional 99.97% Filter Efficiency Meets NIOSH P100-series Test Criteria Advanced Electret Media (AEM) Provides Lightweight, Easy Breathing Comfort Versatile Protection Against Many Oil & Non-oil Based Particulate Contaminants Bayonet Compatibility Allows Use With Many 3M™ Half & Full Face-piece Designs 		
Applications	ConstructionFacility SanitationFood ProcessingGeneral ManufacturingHeavy Infrastructure		
Weight / Carton	2.10 kgs		
Carton Dimension	44 x 26 x 23 cms		
CBM / Carton			
Packing / Carton	50 Sets		
Origin	USA		

3M



3M™ 2097 P100

Particulate Filter Standard NIOSH / A 120311

Exceptional 99.97% Filter Efficiency Meets NIOSH P100-series Test Criteria

Versatile Protection Against Many Oil & Non-oil Based Particulate Contaminants

- Nuisance Odor Relief for Organic Vapor Levels Below the Permissible Exposure Level (PEL)
- Bayonet Compatibility Allows Use With Many 3M™ Half & Full Face-piece Designs

- Construction Facility Sanitation,
- Food Processing,
- General Manufacturing

Weight / Carton 2.10 kgs

Features

Carton Dimension 44 x 26 x 23 cms

Packing / Carton 50 Sets

Origin USA





3M™ 5N11

Particulate Prefilter

Standard NIOSH / 22J1122

NIOSH Approved for **Environments Containing** Certain Non-oil-based Particles

Use on Top of 3M Gas & Vapor Cartridges With

 3M™ 501 Retainer When Particles Are Also Present

Use On Top Of 3Mm[™] 603 Filter Holder & 3M™ 501 Retainer To Reduce Particulate Exposure

Replaceable Particle Filter for Cost Savings

Applications

Features

- Construction.
- Facility Sanitation
- Food Safety
- General Manufacturing
- Heavy Industrial

Weight / Carton 0.91 kgs

Carton Dimension 46 x 23.50 x 10 cms

CBM / Carton 0.0108

Packing / Carton 10 Packets (100 Pieces)

Origin USA

3M



3M™ 501

Filter Retainer

Standard CE 0086 Approved 3M System

Component Designed to Hold 3M Particulate Filter 5N11 & 5p71/07194 (Aad) **Features** (Sold Separately)

Component Works With 3M Respirator 5000 Series, 3M Cartridges 6000 Series & 3M™ Filter Adapter 603

Color Translucent white 4" high x 8.5" long x 4.5" wide

Construction

General Manufacturing

Heavy Industrial

Applications • Manufacturing

Oil & Gas

Pharmaceutical

Transportation

Weight / Carton 1.65 kgs Carton Dimension 53 x 23 x 13.50 cms

CBM / Carton 0.0165

Packing / Carton 5 Packets (50 Pieces)

Origin USA







Spirosacape EEBD (PSI)

Emergency Escape Breathing Device

NIOSH **Approva** 2014/90/EU Marine Equipment Standard 42 CFR Part 84 Unique Automatic Ambient Air Valve Eliminates Risk of Suffocation Unique Patented Air Supply

System in the Hood Maximizes Duration & Minimizes Dead Space

Two-layered Hood Positions **Features** the Inner Mask Correctly Very Flexible Neck Seal Makes it Easy to Don & Comfortable to Wear

> Quiet Air Delivery System Allows Voice Communication Bag Equipped With Carrying Strap

Technical Details

EEBD Steel Cylinder 15 Minutes Escape Time With 3000 PSI Cylinder

Connection Dimensions

Weigh

Cylinder Neck M18 20 x 9.0 x 5.0 inch 15 min - 9.2 lbs /

10 min - 9.5 lbs (empty cylinder)

- CBM / Carton 0.0263

EN 340 General requirements for protective clothing

This European Standard specifies general performance requirements for ergonomics, innocuousness, size designation, ageing, compatibility and marking of protective clothing and the information to be supplied by the manufacturer with the protective clothing

EN 471 High visibility clothing for professional use



Protective clothing able to visually indicate the presence of the user in daylight and in the light of vehicle headlights in the darkness

X = The surface area of fluorescent and retroreflective materials. Garment class (from 1 to 3)

Minimum surfaces of visible material (m2)	Class 3	Class 2	Class 1
Background material	0,8	0,5	0,14
Retro-reflective material	0,2	0,13	0,10
Combined performance material	-	-	0,2
Example	Jacket	Trouser	Belts

Y = Retro-reflective material class (from 1 to 2) Class 1 Reflectance of minor bands


EN 1150 Sets the standard that high visibility clothing needs to meet to ensure that the wearer is clearly visible to motorists against the background in ALL weather and lighting conditions (bright daylight as well as rain, mist, dusk and night-time). To achieve this, clothing must have a combination of fluorescent material for daytime visibility and reflective material for night-time and low light conditions.

EN 342 Protection against cold



Suits and clothing for body protection against cold environments at temperatures below - 5 $^{\circ}\text{C}$

- A Effective thermal insulation * (B, C or R) **
- B Resulting effective thermal insulation * (B, C or R) ** (Optional)
- C Air permeability (from 1 to 3)
- D Resistance to water penetration (from 1 to 2) (Optional)
- X Indicates that the garment has not been tested

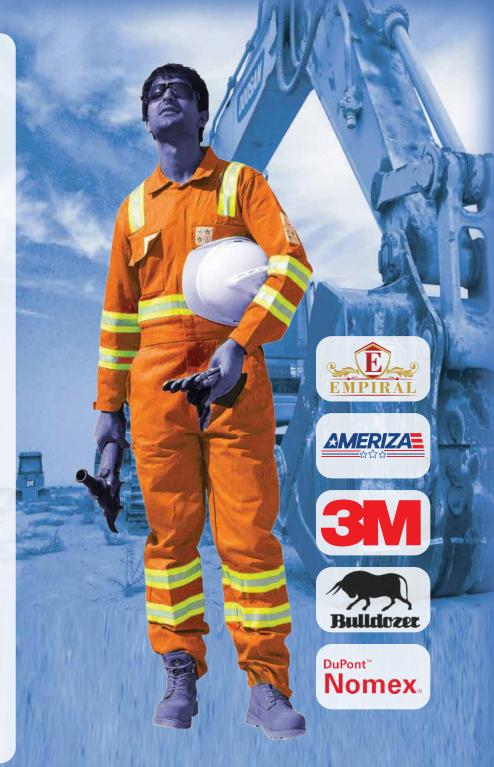

^{*} measured in m2 x K / W

^{**} type of underwear used in the test



∆MERIZA

Chief C

Ciliei C	
100%	Twill Cotton Coverall
Standard	CE, EN CAT 1
Fabric Weight	195 GSM
Features	 Full Sleeves Coverall Sanforized, Mercerized & Pre-shrund Two Way Zipper With Storm Flap Pen Pocket on Arm Elasticated Waist Band for Extra Comfort 1 Upper Chest Snap Fastener 2 Chest Pockets With Velcro Flap Trouser With 2 Swing Pockets 2 Side Pockets With Velcro Flaps & 2 Patch Pockets
Sizes	S-7XL
Applications	 Mechanical Workshop Construction Sites Crane/forklift & Other Moving Equipment Operation Protection From UV Light Food, Marine, Oil & Gas
Weight / Carton	16.33 kgs
Carton Dimension	51.50 x 39.00 x 32.50 cms
CBM / Carton	0.0653
Packing / Carton	25 Pieces
Origin	China





Chief PS			
100%	Twill Cotton Pant/Shirt		
Standard	CE, EN CAT 1		
Fabric Weight	195 GSM		
Features	Sanforized, Mercerized & Pre-shrunk		
Shirt	 5 Metal Buttons Stitched on Shirt Full Sleeves Shirt Snap Fastener Stitched on Sleeves Cuff 2 Chest Pockets With Button Flap 2 Lower Swing Pockets 		
Pant	 2 Swing Pockets 2 Side Pockets With Velcro Flap 2 Back Pockets Elasticated Waist Band for Extra Comfort 		
Sizes	S - 4XL		
Applications	 Mechanical Workshop Construction Sites Crane/forklift & Other Moving Equipment Operation Protection From UV Light 		
Weight / Carton	18.24 kgs		
Carton Dimension	54.50 x 39.50 x 32.50 cms		
CBM / Carton			
Packing / Carton	25 Pieces		
Origin	China		
Royal Blue Grey	Green Yellow Orange		
Petrol Blue Red	Navy Blue White Khaki		



AMERIZA =





Chief C Tanes

cilici e Tapes		
100% Twill (Cotton Coverall with Tapes	
Standard	CE, EN CAT 1	
Fabric Weight	195 GSM	
Features	 Full Sleeves Coverall Sleeves With Slant Stitches One Chest Pocket On Left Side & Snap Fastener In The Middle Front Fly With Zipper Closure Having Both Sides With Horizontal Bartacks Upper With One Snap Fastener Elasticated Waist Band Trouser With Swing Pockets Back Pocket on Right With Four Eyelet Nylon Buttons Closure Ruler Pocket on Right Back 5 Cm Tape Shoulder, Sleeves & Leg Sanforized, Mercerized & Pre-shrunk 	
Sizes	S - 4XL	
Applications	Mechanical WorkshopConstruction SitesFood, Marine, Oil & Gas	
Weight / Carton	19 kgs	
Carton Dimension	51 x 39 x 28 cms	
CBM / Carton		
king / Carton	25 Pieces	



Chief PS Tapes

100% Twill Cotton Pant/Shirt with Tapes

Standard	CE, EN CA
Fabric Weight	195 GSM

 Full Sleeves Shirt • 5 Cm Tape Cross Shoulder

 Sleeves With Slant Stitches With 5 Cm Tape Around

 Two Chest Pocket, left Pocket Shirt With Flap, snap Button

• Two Big Insert Pocket on the Bottom

Pocket Opening With Vertical Bartack

Front Fly With Metal Button Closure

Sleeves Opening With Snap Fastener

 Elasticated Waist Band With 6 Loops • 1 Button in Front Zipper Closure

• Insert Pocket on Both Sides

Back Pocket on Right With Four

Eyelet Nylon Buttons Closure

Ruler Pocket on Right Back

Sizes S - 4XL

Mechanical Workshop

Applications • Construction Sites

• Food, Marine, Oil & Gas

Weight / Carton 19 kgs


Carton Dimension 51 x 39 x 28 cms

CBM / Carton 0.0557 Packing / Carton 25 Pieces

Origin China







Origin China

Comfort C

	<u> </u>
100% Premium Cotton Coverall with Tapes	
	CE, EN CAT 1
Fabric Weight	270 GSM
Features	 Sanforized, Mercerized & Pre-shrunk 2 Inches 6 Sides Reflective Taps Adjustable Velcro Cuff Two Way HD Zipper With Metal Snap Elasticated Waist Band for Extra Comfort 3 Chest Pockets With Velcro Flap 1 Pen Pocket on Left Arm 2 Front Swing Pockets 2 Back Pockets in Trouser With Button
Sizes	S - 7XL
Applications	 Mechanical Workshop Construction Sites Crane/Forklift & Other Moving Equipment Operation Protection From UV Light Welding & Griding Works
Weight / Carton	18.50 kgs
Carton Dimension	60 x 40 x 32 cms
CBM / Carton	
Packing / Carton	
Origin	China






Comfort PS 100% Premium Cotton Pant / Shirt with Tapes Standard CE, EN CAT 1 Fabric Weight 270 GSM Collar, Cuff, Chest Pocket, Button Flyer With Combination Color • 5 Cm Width Reflective Tape Round Sleeve, Shoulder, & Leg 4 Flap Pockets on The Jacket & Attached Arm Pocket Bellow Pocket With Combination Fabric Roll Up Seam Cuff With 5.5 cm Combination Fabric Inside 4 Cm Wide Waist Elastic With 4 Eyelet Button & 5 Ribs 2 Insert Pocket With Horizontal Bartacks Bellow Pocket With Combination Fabric Ruler Pocket 2 Back Pocket With Flap & Combination Fabric Sizes S - 4XL Mechanical Workshop **Applications** Welding & Griding Works Weight / Carton 22.64 kgs Carton Dimension 61.50 x 41.50 x 32.00 cms CBM / Carton 0.09 Packing / Carton 20 Pieces Origin China Petrol Blue Grey Yellow Orange Khaki Navy Blue



European - PS

100% Cott	on European Pant / Shirt
Standard	CE, CAT I
Fabric Weight	235 GSM
Material	100% Genuine Cotton
Feature	Sanforized & Mercerized
Shirt	 European Style Jacket Collar With Button for Adjustment One Pockets With Flap & Velcro on the Left Side of Sleeve Cuffs Front Closure With Zipper & Button Two Pockets at The Bottom With Flap & Velcro With Contrast Color Reflective Tape in Each Shoulder, Sleeve & Back
Pant	 Plastic Zipper Closure Two Lateral Front Pockets Mobile Phone Pocket With Flap & Velcro on The Left Leg Two Knee Pockets With Flap & Velcro With Contrast Color Two Back Pockets With Flap & Velcro With Contrast Color One Tool Pocket With Flap & Velcro on the Back Right Leg One Reflective Tape in Each Leg
Sizes	S - 4XL
Applications	Mechanical Workshop
Weight / Carton	27 kgs
Carton Dimension	39 x 39 x 32 cms
CBM / Carton	
Packing / Carton	20 Pieces





European - PS

Shirt



& Button Patch Pockets With Zipper & Sides One Tape on Each Shoulder / Sleeve

> & Back One Pen Pocket on the Left Chest Pocket

 Two Pockets at The Bottom With Flap & Velcro With Contrast Color

Cuffs With Button

 Plastic Zipper Closure Two Layers Insert Pockets

Two Button Pockets With Flap & Velcro Under Contrast Flap & Pocket

Attach Mobile Pocket With Flap

Pant Inner Waist & Loops With Contrast Fabric, Two Sides Elastic

Two Knee Pockets With Flap & Velcro With Contrast Color

Tool Pocket on the Back Right Leg

Sizes S - 4XL Mechanical Workshop Applications • Construction Sites Food, Marine, Oil & Gas Weight / Carton 22.84 kgs Carton Dimension 60 x 40 x 35 cms

CBM / Carton 0.09

Packing / Carton 20 Pieces

Origin China











Safeguard PRO

Sareguare	I PRO
FR Coverall	260 GSM - European Style
Standard	NFPA 2112: 2012 EN ISO 11612:2015 EN ISO 11611:2015 EN ISO 14116:2015
Fabric Weight	Heavy Duty 260 GSM
Material	100% Genuine Cotton
Features	 Dual Color Hi-viz Fr Reflective Tape Garment Tested For Heat, Flame & Electrostatic Sanforized & Mercerized 2 Front Chest Pockets 1 Pen Pocket 2 Swing Pockets on Leg 2 Back Pockets on Hip Velcro To Adjust The Sleeves Cuffs 2 Way HD Metal Zipper With Flap Elasticated Waist Band for Extra Comfort
Sizes	S - 4XL
Applications	Welding & Allied ProcessesHeat & Limited Flame SpreadElectrostatic Properties
Weight / Carton	26.28 kgs
Carton Dimension	60 X 40 X 34 cms
CBM / Carton	
Packing / Carton	
Origin	China
Red Royal Blue	e Khaki Navy Blue Orange



Safeguard C

Sureguara C	
FR Coverall	320 GSM - European Style
Fabric Weight	EN ISO 11612:2015 EN ISO 11611:2015 EN ISO 14116:2015 Heavy Duty 320 GSM
Material	100% Genuine Cotton
Features	 Dual Color Hi-viz FR Reflective Tape Garment Tested for Heat, Flame & Electrostatic Sanforized & Mercerized 2 Front Chest Pockets 1 Pen Pocket 2 Swing Pockets on Leg 2 Back Pockets on Hip Velcro To Adjust The Sleeves Cuffs Two Way HD Metal Zipper With Flap Elasticated Waist Band for Extra Comfort
Sizes	S - 4XL
Applications	Welding & Allied ProcessesHeat & Limited Flame SpreadElectrostatic Properties
Weight / Carton	30 kgs
Carton Dimension	63 x 40 x 34 cms
CBM / Carton	
Packing / Carton	
Origin	China

Khaki

Navy Blue Orange

Royal Blue







Spartan I

Cargo Pants, 6	5/35 Polyester/Cotton Fabric
Standard Fabric Weight Material	
Features	 Abrasion Resistant Anti-wear With Knee Pad Insert Knee Area Designed For Extra Comfort & Durability Tool Hammer & Ruler Loops Two Tone Double Reinforced Side Pocket on Left Leg Triple Pocket With Key-chain Holder on the Right Leg Dual Contrast Bar Tacks Large Belt Loop With Waist Band Extra Long Open Pocket for Tools
Sizes	S - 4XL
Applications	WarehousingManufacturingAirportsShipping & Marine Industry
Weight / Carton	18 kgs
Carton Dimension	51 x 39 x 35 cms
CBM / Carton	
Packing / Carton	
Origin	China









Spartan II

Cargo Pan	Cargo Pants, 100% Cotton Canvas	
Standard	CAT I	
Fabric Weight	240 GSM	
Material	100% cotton canvas fabric	
Features	 Abrasion Resistant Anti-wear with Knee Pad Insert Double Reinforced Side Pocket On The Right Leg With Velcro & Flap Plus Ruler, Hammer & Tools Loop Side Pocket On The Left Leg With Velcro & Flap + Pen & Mobile Pocket Large Belt Loop With Waist Band Dual Contrast Bartacks Elastic Two Sides & 7 Loops Waist Oxford Fabric Combination Under Waist Belt, Bottom of Back Pocket 	
Sizes	S - 4XL	
Applications	WarehousingManufacturingAirportsShipping & Marine Industry	
Weight / Carton	18 kgs	
Carton Dimension	51 x 39 x 35 cms	
CBM / Carton	0.0617	
Packing / Carton	30 Pieces	
Origin	China	













Labcoat

PP Non-Woven Lab Coat	
Standard	EN CATI
Fabric Weight	30 GSM
Material	PP Non-Woven
Style	Classic Style With Collar
Size	110 cm x 140 cm
Color	White
Features	 4 Buttons Without Pocket & Open Cuffs PP Non-woven to Protect From Fluids Nontoxic & Do Not Cause Irritation on Skin Light Weight Comfortable to Wear Breathable
Applications	LaboratorySchoolsDentalHospitals
Weight / Carton	4.26 kgs
Carton Dimension	49 x 32 x 33.50 cms
CBM / Carton	
Packing / Carton	
Origin	China



Disposable Coverall

Non-Woven Breathable Polypropylene	
Standard	EN CATI
Fabric Weight	40 GSM - White 50 GSM - White
Material	PP Non-Woven
Style	Disposable Coverall With Elastic Hood & Wrist
Features	 Soft & Light Weight Full Body Coverage With Protection From Dust, Grinding Paint, Liquid, Light Chemical Elasticated Cuff, Ankles, Waist Design, Zipper With Front Closure Flap, Serged Seams & Attached Hood Excellent Quality, Durable & Long-lasting Protection
Sizes	M - 3XL
Applications	 Spray Painting, Manufacturing Food Services, Medical, clean Room Industrial & Pharmaceutical Processing Asbestos Inspection, Insulation Laying Vehicle & Machine Maintenance
Weight / Carton	5.52 kgs
Carton Dimension	49 x 34 x 27 cms
CBM / Carton	
Packing / Carton	
Origin	China







Proguard Type 5/6

Proguard	Type 5/6
Proguar	d Type 5/6 SMS Coverall
Standard	EN13982-1(&2):2004(Type 5) EN13034:2005:A1:2009(Type 6) EN1073-2:2002
Fabric Weight	
Color	White
Features	 Water Prof Fabric Light Base Chemicals Resistant Coverall With Elastic Hood, Waist, Ankle Protection Against Hazardous Substances & Contamination of Both Products & Personnel Zipper Front With Storm Flap 3 Thread Stitching Serged Seam
Sizes	M - 3XL
Applications	 Chemical Industry Pharmaceutical Industry Petroleum & Crude Oil Environments Tank Cleaning, Inspection & Maintenance Agrochemicals Handling Decommission of Production Plants Disposal of Hazardous Materials
Weight / Carton	10.80 kgs
Carton Dimension	21.50 x 14.50 x 19 cms
CBM / Carton	0.006

Packing / Carton 50 Pieces Origin China



Proguard	Type 4/5/6
Proguard Typ	e 4/5/6 Microporous Coverall
Standard	Type 4 EN14605:2005+A1:2009 Type 5 EN13982-1(&2):2004/A1:2010 Type 6 EN13034:2005:A1:2009 EN14126:2003 EN1073-2:2002 EN1149-5:2008 With EN1149-1:2006
Fabric Weight	63 GSM
Features	 Waterproof Chemical Splashes Resistant Fabric Design As Barrier to Infective Agents & Radio Active Particulates Anti Static Properties Coverall With Taped Seam, Hood, Elastic Wrist/waist/ankle Zipper Front With Storm Flap 3 Thread Stitching Serged Seam
Sizes	M - 3XL
Applications	 Chemical Industry Pharmaceutical Industry Petroleum & Crude Oil Environments Tank Cleaning, Inspection & Maintenance Agrochemicals Handling Decommission of Production Plants Disposal of Hazardous Materials
Weight / Carton	13.5 kgs
Carton Dimension CBM / Carton Packing / Carton	
3	

Origin China





Ю.			
	w	IL)	
		_	

F 010 1		
130 GSM with Retro Reflective Tapes		
	CE, CAT I	
Fabric Weight	130 GSM	
	Fluorescent Yellow & Orange	
Material	100% Polyester birdeye fabric	
Features	 Full Sleeves T-shit Navy Blue Collar & Elasticated Cuffs 3 Nylon Buttons Design With a Comfort Fit Hi-viz Fabric One Pocket on Chest Left Side 	
Tapes	2 Horizontal 2 Vertical 2 on each sleeve	
Sizes	S - 4XL	
Applications	 Airports, Maintenance works, Warehouse Roads constructions, Industrial & factory Design & Construction, Mining Transportation 	
Weight / Carton	14 kgs	
Carton Dimension	52 x 45 x 33 cms	
CBM / Carton	0.077	
Packing / Carton	50 Pieces	
Origin	China	



420.00	Justitle Datus Deflective Tenes
	M with Retro Reflective Tapes
	CE, CAT I
Fabric Weight	130 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester birdeye fabric
Features	 Full Sleeves T-shit Navy Blue Collar & Elasticated Cuffs 3 Nylon Buttons Design With a Comfort Fit Hi-viz Fabric One Pocket on Chest Left Side
Tapes	2 Horizontal 2 on each sleeve
Sizes	S - 4XL
Applications	 Airports, Maintenance works, Warehouse Roads constructions, Industrial & factory Design & Construction Mining Transportation
Weight / Carton	14 kgs
Carton Dimension	52 x 45 x 33 cms
CBM / Carton	0.077
Packing / Carton	50 Pieces
Origin	China



150 GSM with Perforated Reflective Tapes		
Standard	CE, CAT I	
Fabric Weight	150 GSM	
	Fluorescent Yellow	
Material	55% Cotton / 45% Polyester	
Features	 Full Sleeves T-shit Lightweight Hi-viz Fabric Butter Soft on the Inside Rib Knit Collar & 3 Buttoned Placket Cotton Mixture in Fabric Makes It Suitable to Wear in Hot Temperatures. 	
Tapes	2 Horizontal 2 Vertical 2 on each sleeve	
Sizes	S - 4XL	
Applications	 Airports, Maintenance works, Warehouse Roads constructions, Industrial & factory Design & Construction, Mining Transportation 	
Weight / Carton	14 kgs	
Carton Dimension	52 x 45 x 33 cms	
CBM / Carton		
Packing / Carton		
Origin	China	



Glow

HD Hi-Vis Breathable Mesh (Net) Type Vest		
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013	
Fabric Weight	120 GSM	
Color	-	
Material	100% Polyester Mesh (Net) Type	
Features	 9 cm (3.5 Inches) Reflective Tape With Double Side Fluorescent Edges Two Lower Flap Pockets, One Right Side Flap Pocket With Additional Mobile Pocket Over it On Left Side Open Pocket & Attached on it 4 Pen Pockets Side Black Ventilation for Executive Look Loop Closures on Front Shoulder Sides HD Nylon Zipper Closure in Black Black Knitted Piping for Daytime Visibility 	
Sizes	S - 4XL	
Applications	Utility Workers, Surveyors, FlaggersEmergency Responders, Warehouse	
Weight / Carton	12.90 kgs	
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	China	



MultiGlow

HD Executive Fabric Type Vest	
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
	Fluorescent Yellow & Orange
Material	100% Polyester Knit Fabric Type
Features	 5 cm Retro Reflective Tape Two Lower Flap Pockets With Velcro Enclosures One Id Pocket on Left Side & One Mobile Pocket With Velcro on Right Side Fluorescent Orange Cloth Knitted Piping for Day/night Time Visibility HD Nylon Zipper Closure in Black
Sizes	S - 4XL
Applications	Emergency RespondersUtility WorkersSurveyorsFlaggersWarehouse
Weight / Carton	8.70 kgs
Carton Dimension	45 x 25 x 32 cms
CBM / Carton	0.036
Packing / Carton	
Origin	China





3M MultiGlow

HD Ex	recutive Fabric Type Vest	
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013	
Fabric Weight	120 GSM	
Color	Fluorescent Yellow & Orange	
Material	100% Polyester Knit Fabric Type	
Features	 5 cm 3M 2925 Reflective Tape With 25 Wash 3M Watermark Two Lower Flap Pockets With Velcro Enclosures One Id Pocket on Left Side & One Mobile Pocket With Velcro On Right Side Fluorescent Orange Cloth Knitted Piping for Day/night Time Visibility HD Nylon Zipper Closure in Black 	
Sizes	S - 4XL	
Applications	Utility WorkersSurveyors, FlaggersEmergency RespondersWarehouse	
Weight / Carton	9.50 kgs	
Carton Dimension	45 x 25 x 32 cms	
CBM / Carton	0.036	
Packing / Carton	50 Pieces	
Origin	China	



3M Radiant

	STITAGIATIC		
HD Executive Fabric Type Vest			
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013		
Fabric Weight	120 GSM		
Color	Fluorescent Yellow & Orange		
Material	100% Polyester Fabric Type		
Features	 5 cm 3M 2925 Reflective Tape With 25 Wash 3M Watermark HD Nylon Zipper Closure in Black Black Knitted Piping for Daytime Visibility 		
Sizes	S - 4XL		
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers Surveyors Emergency Responders Flaggers 		
Weight / Carton	14.90 kgs		
Carton Dimension	45 x 25 x 48 cms		
CBM / Carton	0.054		
Packing / Carton	100 Pieces		
Origin	China		



HD Executive Combination Fabric Type Vest

Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Red & Fluorescent Yellow With Navy Blue
Material	100% Polyester Fabric Type
Features	 5 cm Retro Reflective Tape Two Lower Bellow Pockets With Combination Fabric, Having Flap & Velcro Enclosures One Id Pocket on Left Side & One Mobile Pocket With Velcro on Right Side Black Knitted Piping for Daytime Visibility HD Nylon Zipper Closure in Black D-ring for Hanging/clipping Device/radio
Sizes	S - 4XL
Applications	Warehouse WorkersDelivery Truck DriversUtility Workers, SurveyorsEmergency Responders, Flaggers
Weight / Carton	9.11 kgs
Carton Dimension	45 x 25 x 32 cms
CBM / Carton	0.036
Packing / Carton	50 Pieces
Origin	China



Twinkle

Executive	Back Ventilation & Fabric Type
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fabric Type
Features	 9 Cm (3.5 Inches) Reflective Tape With Double Side Fluorescent Edges Lower Two Flap Pockets With Velcro Enclosures Having Side Buckels One Right Side & One Left Pocket Side Fron Flap Pocket Along With Pen Pocket Knitted Cloth Piping of Contrasting Color In Each Model for Hi-visibility 110 GSM Mesh (Net) Type From Backside & 120 GSM Fabric Type Front
Sizes	S - 4XL
Applications	Warehouse WorkersDelivery Truck DriversUtility Workers, Surveyors
Weight / Carton	9.11 kgs
Carton Dimension	45 x 25 x 32 cms
CBM / Carton	0.036
Packing / Carton	50 Pieces
Origin	China



Sparkle

Sparkic		
Executive Back Ventilation & Fabric Type		
Standard Fabric Weight	EN ISO 20471:2013	
	100% Polyester Fabric Type	
Features	 9 cms (3.5 Inches) Reflective Tape With Double Side Fluorescent Edges Lower Two Flap Pockets With Velcro Enclosures One Left Side 4 Pens Pocket & Right Side Mobile With Pen Pocket Same Fabric Color Nylon Zipper Closure Knitted Cloth Piping of Contrasting Color In Each Model for Hi-visibility 110 GSM Mesh (Net) Type From Backside & 120 GSM Fabric Type Front 	
Sizes	S - 4XL	
Applications	Emergency Responders, Utility WorkersSurveyors, Flaggers, Warehouse	
Weight / Carton	9.11 kgs	
Carton Dimension	45 x 25 x 34 cms	
CBM / Carton		
Packing / Carton		
Origin	China	



Bright

Drigit	
HD N	lanagerial Fabric Type Vest
Standard	EN ISO 20471:2013
Fabric Weight	
	Fluorescent Yellow & Orange
Material	100% Polyester Fabric Type
Features	 Two Horizontal, Two Front Vertical & Backside Cross Type Retro-Reflective Tapes Lower Two Flap Pockets With Velcro Enclosures One Left Side Mobile Pocket & Right Side Flap Pocket HD Nylon Zipper Closure in Black Black Knitted Piping for Daytime Visibility
Sizes	S - 4XL
Applications	Shopping Cart RetrieversWarehouse WorkersUtility WorkersSurveyorsFlaggers
Weight / Carton	8.48 kgs
Carton Dimension	45 x 25 x 30 cms
CBM / Carton	
Packing / Carton	50 Pieces
Origin	China



Glitter

Gilttei	
HD Sup	pervisory Fabric Type Vest
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow, Orange, Green, Blue White, Red
Material	100% Polyester Fabric Type
Features	5 cms Retro Reflective TapeVelcro EnclosureBlack Net Type Piping
Sizes	S - 4XL
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers Surveyors Emergency Responders Flaggers
Weight / Carton	12.13 kgs
Carton Dimension	45 x 25 x 42 cms
CBM / Carton	
Packing / Carton	
Origin	China





Flare

i idi C	
Hi	-Vis Fabric Type Vest
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fluorescent Fabric
Features	 PVC Tape Crush Type Hi-vis Reflective For Day & Night Piping Same as Fabric Color 2 Vertical, 2 Horizontal Hi-vis Tapes Velcro Enclosure Provides Enhanced Visibility During Inclement Weather
Size	S - 4XL
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers, Surveyors Emergency Responders
Weight / Carton	13.70 kgs
Carton Dimension	45 x 25 x 48 cms
CBM / Carton	0.054
Packing / Carton	100 Pieces
Origin	China



Hi-Viz Mesh (Net) Type Vest

	The trial moon (trot) Type Teet		
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013		
Fabric Weight	110 GSM		
Color	Fluorescent Yellow & Orange		
Material	100% Polyester Fluorescent Fabric		
Features	 2-inch Retro Reflective Tape Piping In Contrast HD Nylon Zipper Closure 2 Vertical, 2 Horizontal Hi-vis Tapes Contrasting Trim Piping/borders Maximizes Daytime Visibility Generous Fit for Wearer Comfort 		
Size	S - 4XL		
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers, Surveyors Emergency Responders 		
Weight / Carton	12 kgs		
Carton Dimension	45 x 25 x 50 cms		
CBM / Carton	0.056		
Packing / Carton			
Origin	China		



Star

otai		
HD Sup	HD Supervisory Fabric Type Vest	
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013	
Fabric Weight	110 GSM	
	Fluorescent Yellow / Orange	
Material	100% Polyester Fabric Type	
Features	5 cm Retro Reflective TapeVelcro EnclosureBack Net Type Piping	
Sizes	S - 4XL	
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers Surveyors Emergency Responders Flaggers 	
Weight / Carton	11.73 kgs	
Carton Dimension	45 x 25 x 50 cms	
CBM / Carton	0.047	
Packing / Carton	100 Pieces	
Origin	China	



Shine

Lightwe	ight Hi-Vis Fabric type vest
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	60 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fluorescent Fabric
Features	 2-inch Retro Reflective Tape Piping In Contrast HD Nylon Zipper Closure 2 Vertical, 2 Horizontal Hi-vis Tapes Contrasting Trim Piping/borders Maximizes Daytime Visibility Generous Fit for Wearer Comfort
Size	2XL
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers, Surveyors Emergency Responders
Weight / Carton	9 kgs
Carton Dimension	45 x 25 x 36 cms
CBM / Carton	0.04
Packing / Carton	100 Pieces
Origin	China





Arctic II

7 11 0010 11	
	Winter Jacket Parka Type
	CE EN343
Fabric Weight	-
Material	300d Oxford, Water Pressure 500mm
Features	 Black Polyester Taffeta 10x10cm Twill Slant Stitch 160g Collodion Cotton Spray Padding Hi-Vis Retro-reflective Tapes 2 Horizontal 2 Vertical & 2 Each on Sleeves Black Nylon Zipper Two-way Separating Resin 5 Plastic Buttons From Collar to Lower Waterproof Polyester Material In-penetrable Moisture Barrier to Guarantee Dryness Fold-able Hood With Zip Lock Pocket Elasticated Cuffs & Bottom Designed to Trap Hot Ar Inside, Which Helps Increase in Warmness Lower Two Deep Pockets With Flap Lids Closure Cold Temperature Resistant Up-to -50 °C
Color	Yellow
Sizes	S - 3XL
Applications	Protects in Cold & Rainy SeasonField WorksMaintenance Jobs on Site Etc.
Weight / Carton	22 kgs
Carton Dimension	67 x 46 x 61 cms
CBM / Carton	0.1188
Packing / Carton	
Origin	China



Bulldozer Fireman Suit

Buildozer	Fireman Suit
Hea	vy Duty Fire Fighting Suit
Standard	NFPA 2112 NFPA 70E EN ISO 11612 EN 14116 EN 61482-1-2 CAT II
Fabric Weight	260 GSM
Material	100% Cotton Fire Retardant Pyrovatex
Features	 Built of Three Layers - The Outer Layer, Detachable Thermo Isolating Lining High Up Collar for Extra Protection Cuff HD Velcro Closure Special Reflective Liner On Sleeves, Back & Bottom Pockets for Detectors, Torches Protection for Knees
Color	Navy Blue
Applications	 Protects From Flash Fire Welding Electric Arc Protection Protection From Heat & Flame Protection From Molten Metal Splash
Weight / Carton	20 kgs
Carton Dimension	60 x 40 x 50 cms
CBM / Carton	
Packing / Carton	
Origin	United Kingdom



Torch Apron One & Two Piece

Torch Apron one & Two Ficee	
Le	eather Welding Apron
Standard	CE CAT 1, EN 388
Material	Leather
Length	36 Inches
Width	24 Inches
Features	 Natural Split Leather Cloth Fastening With Hook To Wear Over Clothing Size: 24x 36inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals
Applications	CuttingWeldingSmall Particles of Molten SplashProtection From Radiant Heat
Weight / Carton	23.85 kgs
Carton Dimension	70 x 35 x 30 cms
CBM / Carton	
Packing / Carton	
Origin	Pakistan





Torch Sleeves

Leather Welding Sleeves	
Standard	CE CAT 1, EN 388
Material	Leather
Length	22 Inches
Features	 Natural Split Leather Cloth Fastening With Hook To Wear Over Clothing Size: 22inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals
Applications	CuttingWeldingSmall Particles of Molten SplashProtection From Radiant Heat
Weight / Carton	21.67 kgs
Carton Dimension	60 x 38 x 30 cms
CBM / Carton	
Packing / Carton	50 Pairs
Origin	Pakistan



Torch Cover

Leather Welding Shoe Cover	
Standard	CE CAT 1, EN 388
Material	Leather
Features	 Natural Split Leather Cloth Fastening With Hook To Wear Over Clothing Size: 12inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals
Applications	CuttingWeldingSmall Particles of Molten SplashProtection From Radiant Heat
Weight / Carton	21.67 kgs
Carton Dimension	60 x 38 x 30 cms
CBM / Carton	0.0648
Packing / Carton	50 Pairs
Origin	Pakistan



Torch Jacket

Welding Jacket, Crust Leather

Standard CE, Cat. I, EN 388 Natural Split Leather Button Closing To Wear Over Clothing Full Leather Collar. Features • Size: XL (One Size Fits All) Two Large Front Pockets Excellent Leather Thickness Protection Against Small Droplets of Molten Metals. Cutting, Welding Applications • Short Contact With Flames Protection From Radiant Heat Weight / Carton 14.90 kgs Carton Dimension 42 x 31 x 40 cms CBM / Carton 0.0520 Packing / Carton 10 Pieces Origin Pakistan



Welding Apron, Golden Suede Leather

Welaling F	pron, Coluen Sueue Leather
Standard	CE, Cat. I, EN 388
Features	 Suede Leather Nylon Fastening With Hook Two Pockets on Front To Wear Over Clothing Size: 24x 36inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals
Applications	Cutting, WeldingSmall Particles of Molten SplashShort Contact With FlamesProtection From Radiant Heat
Weight / Carton	35.85 kgs
Carton Dimension	38 x 35 x 66 cms
CBM / Carton	0.0877
Packing / Carton	50 Pieces
Origin	Pakistan



Golden Sleeve

Welding Sleeve, Golden Suede Leather	
Standard CE, Cat. I, EN 388	
 Suede Leather Nylon Fastening With Hook To Wear Over Clothing Size: 22inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals 	
 Cutting Welding Small Particles of Molten Splash Short Contact With Flames Protection From Radiant Heat 	
Weight / Carton 27.90 kgs	
Carton Dimension 62 x 37 x 30 cms	
CBM / Carton 0.0688	
Packing / Carton 50 Pairs	
Origin Pakistan	





Welding Shoe Cover, Golden Suede Leather

Welding Shoe Cover, Golden Suede Leather	
Standard	CE, Cat. I, EN 388
, Features	 Suede Leather Velcro Fastening To Wear Over Clothing Size: 12inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals.
Applications	CuttingWeldingSmall Particles of Molten SplashShort Contact With FlamesProtection From Radiant Heat
Weight / Carton	20.14 kgs
Carton Dimension	36 x 40 x 39 cms
CBM / Carton	0.0561
Packing / Carton	50 Pairs
Origin	Pakistan





Golden Jacket

Welding Jacket, Golden Suede Leather

	· · · · · · · · · · · · · · · · · · ·
Standard	CE, Cat. I, EN 388
Features	 Suede Leather Button Closing to Wear Over Clothing Full Leather Collar. Size: One Size Fits All Two Large Front Pockets Excellent Leather Thickness Protection Against Small Droplets of Molten Metals
Applications	Cutting, WeldingShort Contact With FlamesProtection From Radiant Heat
Weight / Carton	20.14 kgs
Carton Dimension	41 x 32 x 40 cms
CBM / Carton	0.0524
Packing / Carton	10 Pieces
Origin	Pakistan





Powder Free, 7g, Transparent		
Standard	CE CAT 1	
Features	 Light Weight Durable Resist Tearing Latex Free Offers Effective General-purpose Barrier Protection Ideal for Food Processing Task 	
Applications	Food ProcessingBeautyManufacturingConstructionHygienicDaily Use	
Weight / Carton	6.40 Kgs	
Carton Dimension	37 x 30 x 18 cms	
CBM / Carton		
Packing / Carton	10 Bags	
Origin	China	









Vertex Plus

Full Body Harness	
Standard	EN 361:2002
Features	 Shoulder D-Ring Side D-Ring Loops on Harness for Body Belt High Visibility Webbing Lanyard Attached Directly to D-Ring or Attachment Element Snap Fastener on Shoulder Strap for Retaining Lanyard
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction
Color	Green / Black
	Universal
Weight / Carton	11.8 kgs
Carton Dimension	49 x 26 x 24 cms
CBM / Carton	
Packing / Carton	
Origin	China

Full Body Harness with Comfort Belt

Full DO	dy namess with Comfort beit
Standard	EN 361:2002
Features	 Shoulder D-Ring Side D-Ring Loops on Harness for Body Belt High Visibility Webbing Lanyard Attached Directly to D-Ring or Attachment Element Snap Fastener on Shoulder Strap for Retaining Lanyard
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction
Color	Green / Black
Sizes	Universal
Weight / Carton	15 kgs
Carton Dimension	40 x 28 x 34 cms
CBM / Carton	
Packing / Carton	
Origin	China

Comfort Belt

Safety	Belt with two Lateral D-rings
Standard	CE 0194,EN 420,EN 358:1999
Features	 Waist Circumference: Approx 80-120cm (Adjustable) Black Part Dimension: Approx 64x9cm Band Width: 4.3cm Equipped With 2 D-rings Easy Connection & Quick Release High-strength Polyester & Carbon Steel Wear-resistant & Durable
Material	Polyester, Carbon Steel
Applications	 Great for Outdoor Climbing Mountaineering Personal Riding Climbing Rappelling etc
Color	Green / Black
	Universal
Weight / Carton	· ·
Carton Dimension	
CBM / Carton	
Packing / Carton	
Origin	China









Vertex Web U

vertex w	CD O
Webbing Lanyard U Type	
Standard	EN 355:2002
Features	 Standard 1.8 Length (6 ft.) Shock Absorber High Strength Webbing, 22kN (5000 Lbs.) High Visibility Webbing One Scaffolding Hook, 16kN (3600 Lbs.) One Carabiner Hook Capacity of 310 Lbs. at Tree Fall upto 6 ft.
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction
Color	Green / Black
Sizes	Universal
Weight / Carton	-
Carton Dimension	
CBM / Carton	
Packing / Carton	20 Pieces

Origin China

Vertex Web Y

vertex web t		
Webbing Lanyard Y Type		
Standard	EN 355:2002	
Features	 Standard 1.8m Length (6 ft.) Plus Shock Absorber High Strength Webbing, 22kN(5000lbs) Hi Visibility Rope Two Scaffolding Hooks, 16kN (3600lbs) One Carabiner Hook Capacity of 310lbs at Free Fall up to 6 ft. 	
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction 	
Color	Green / Black	
Sizes	Universal	
Weight / Carton		
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	China	

Vertey Pone II

vertex Rope U	
Rope Lanyard U Type	
Standard	EN 354:2010
Features	 Standard 1.8 Metres (6 ft.) without Shock Absorber One Side Karabiner & One Side Scaffolding Hook U-Type Rope Lanyard One Side Easy 308 Karabiner One Side Silver Plated Scaffolding with Easy SH 60 Hook
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction
Color	White / Black
	Universal
Weight / Carton	18.90 kgs
Carton Dimension	48 x 25 x 25 cms
CBM / Carton	
Packing / Carton	20 Pieces
Origin	China

Vertex Rope Y		
Rope Lanyard Y Type		
Standard	EN 355:2002	
Features	 Standard 1.8 Length (6 ft.). Shock Absorber High Strength Webbing, 22kN (5000 Lbs.) High Visibility Webbing Two Scaffolding Hook, 16kN (3600 Lbs.) One Carabiner Hook Capacity of 310 Lbs. at Tree Fall upto 6 ft. 	
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction 	
Color	White / Black	
	Universal	
Weight / Carton	•	
Carton Dimension		
CBM / Carton		
Packing / Carton Origin		
— Origini	UIIIIIa	

EN 420 PROTECTIVE GLOVES - GENERAL REQUIREMENTS

Gloves "just for minor risks"

Protection for:

- Mechanical actions, the effects of which are superficial (gerdening gloves etc.);
- Bland cleaning materials with easily reversible effects (gloves that protect against diluted detergents etc.);
- Risks encountered when handling hot components that do not expose the user to a higher temperature that 50 OC or to hazardous impact;
- Atmospheric agents that are neither exceptional nor extreme (seasonal clothing);
- Minor impact and vibrations that do not involve vital parts of the body, the effects of which cannot cause irreversible injuries.

EN 388 MECHANICAL RISKS



Protection against physical and mechanical aggression caused by abrasion, blade cutting, tearing, puncture.

a Resistance to abrasion (level from 0 to 4)

b Resistance to blade cutting (level from 0 to 5)

c Resistance to tear (level from 0 to 4)

d Resistance to puncture (level from 0 to 4)

0: glove failed specific test

X: glove was not tested

EN 1082-1 GLOVES AND SLEEVES THAT PROTECT AGAINST BLADE CUTTING



They offer a certain protection against stabbing. They are used in particular in slaughterhouses where hand knives are used and in any place where meat, fish and shellfish are processed, in catering and in manual meat boning premises. They also offer suitable protection to those who use hand knives in the plastic, leather, textile and paper industries and in laying floors and similar activities.





Gorilla Active I Regular

Palm Coated, NBR (Nitrile Butadine Rubber)

Palm Coate	ed, NBR (Nitrile Butadine Rubber)
Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
Features	 Robust Thick Nitrile Coating for Increased Durability & Ideal of Oily Environment Excellent Dry Grip Light Weight Liner for Comfort & Dexterity Excellent Abrasion & Tear Resistance Knit Wrist Cuff & Breathable Back
Coating	13 Gauge White Polyester LinersGrey Nitrile Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Automotive Industry Body Shop Assembly General Maintenance Light Metal Carpentry Mechanical Industry
Weight / Carton	7 kgs
Carton Dimension	45 x 26 x 25 cms
CBM / Carton	
	20 Dozen (240 Pairs)
Origin	China



Gorilla Active II Premium

Palm Coated, NBR (Nitrile Butadine Rubber)

	,
Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
Features	 Robust Thick Nitrile Coating for Increased Durability & Ideal of Oily Environment Excellent Dry Grip Light Weight Liner for Comfort & Dexterity Excellent Abrasion & Tear Resistance Knit Wrist Cuff & Breathable Back
Coating	13 Gauge White Polyester LinersGrey Nitrile Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Automotive Industry Body Shop Assembly General Maintenance Light Metal Carpentry Mechanical Industry
Weight / Carton	10 kgs
Carton Dimension	45 x 26 x 25 cms.
CBM / Carton	0.0292
Packing / Carton	,
Origin	China



Gorilla Active III

Palm Coated NITRILON (Grip, Durability, Dexterity)

Palm Coated N	ITRILON (Grip, Durability, Dexterity)
Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
Features	 Excellent Fit, Flexible Wearing Comfort Seamless Liner Allowing to Breath And Provide Minimal Lint Recommended for Precise Operations Requiring Maximum Dexterity Ideal for Detailed Assembly, Inspection, Light Fabricatio
Coating	Black Flat Nitrile Coatin15 Gauge White Polyester Liner
Length	23.5 cm
Sizes	Medium, Large, XLarge
Applications	AutomotiveAssemblyMechanicalGeneral IndustryElectronicsIndustrial Manufacturing
Weight / Carton	7.77 kgs
Carton Dimension	38 x 28 x 29 cms
CBM / Carton	0.0309
	12 Dozen (144 Pairs)
Origin	Bangladesh



Gorilla Flex I

Coated, NBR	Microfoam (Nitrile Butadine Rubber)
Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
Features	 Microfoam Nitrile Provides Excellent Durability, Dexterity & Tactile Sensitivity Microfoam Nitrile Coating Provides Great Grip in Oily Conditions, Lint Free Liner Ergonomic Hand Shape for Comfortable Fit Breathable Polymer & Liner Fluid/grease Repellent Polymer & Liner for Clear & Comfortable Hands
Coating	13 Gauge Grey Polyester LinersBlack Microfoam Nitrile Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	Assembly in Presence of Oil/GreaseHydraulics/Wood WorkingAutomotive IndustryAir/sea Transport
Weight / Carton	6 kgs
Carton Dimension	53 x 29 x 21.50 cms
CBM / Carton	
Packing / Carton	,
Origin	China



Gorilla Flex II

Palm Coated Nitrilon Sponge

Standard	CE, CATII EN388:2016 3121X EN420:2003/A1:2009
Features	 Excellent Fit, Excellent Protection Seamless, Flexible for Wearing Comfort Sponge Nitrile Coating Gives Resistance Against Abrasion High Dexterity Level Open Back Keeps Hand Cool & Perspiration Free
Coating	Grey Foam Nitrile Sponge Coating13gg White Polyester Line
Length	23.5 cm
Sizes	Medium, Large, XLarge
Applications	AutomotiveAssemblyMechanicalGeneral IndustryElectronicsIndustrial Manufacturing
Weight / Carton	7.62 kgs
Carton Dimension	38 x 28 x 29 cms
CBM / Carton	0.0308
Packing / Carton	12 Dozen (144 Pairs)
Origin	Bangladesh



Gorilla Flex Cool I

Superio	Superior Grip, Second-skin Comfort	
Standard	CE, Cat. II EN388:2016 4121X EN420:2003/A1:2009	
Features	 Fine Gauge Synthetic Liner Excellent Grip in Dry, Wet Conditions Spandex Content Gives a Snug Fit Soft, Breathable & Flexible Low-Particulate Shedding Abrasion Resistance (10,000+ Cycles) 	
Coating	DexTec™ Coating	
Liner	15 gg Nylon, Spandex, Polyester	
Length	23.5 cm	
Sizes	Medium, Large, XLarge	
Applications	 Automotive Assembly Mechanical General Industry Electronics Industrial Manufacturing 	
Weight / Carton	8.75 kgs	
Carton Dimension	59 x 32 x 33 cms	
CBM / Carton		
_	12 Dozen (144 Pairs)	
Origin	Pakistan	



Gorilla Black I Regular

Palm	Palm Coated, PU (Poly Urethane)	
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009	
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back 	
Coating	Black Polyester LinerBlack PU Palm Coated	
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL	
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc. 	
Weight / Carton	7 kgs	
Carton Dimension	42 x 25 x 45 cms	
CBM / Carton		
	20 Dozen (240 Pairs)	
Origin	China	



Gorilla Black II Premium

Palm	Coated, PU (Poly Urethane)
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	Black Polyester LinerBlack PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc.
Weight / Carton	7 kgs
Carton Dimension	
CBM / Carton	
Packing / Carton	, ,
Origin	China



Gorilla White I Regular

dornia Winte I Regular	
Palm	Coated, PU (Poly Urethane)
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	White Polyester LinerWhite PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc.
Weight / Carton	7 kgs
Carton Dimension	42 x 25 x 45 cms
CBM / Carton	
	20 Dozen (240 Pairs)
Origin	China



Gorilla White II Premium

Palm	Coated, PU (Poly Urethane)
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	White Polyester LinerWhite PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc.
Weight / Carton	7 kgs
Carton Dimension	42 x 25 x 45 cms
CBM / Carton	
Packing / Carton	
Origin	China



Gorilla Grey I Regular

Palm Coated, PU (Poly Urethane)	
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	Grey Polyester Liner With Grey PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc.
Weight / Carton	7 kgs
Carton Dimension	42 x 25 x 45 cms
Packing / Carton	,
Origin	China



Gorilla Grey II Premium

dorina drey 11 Premium		
Palm	Coated, PU (Poly Urethane)	
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009	
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back 	
Coating	Grey Polyester Liner With Grey PU Palm Coated	
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL	
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc. 	
Weight / Carton	7 kgs	
Carton Dimension	42 x 25 x 45 cms	
CBM / Carton	0.0473	
Packing / Carton	,	
Origin	China	



Gorilla Bull I

Palm Coated, Latex (Natural Rubber)	
Standard	CE, CATII EN388:2016 2142X EN420:2003/A1:2009
Features	 Palm Coated With Latex Wrinkle Finish For Extraordinary Dry & Wet Grip Ergonomic Design for a Comfortable Fit Knit Wrist Cuff & Breathable Back High Grip Resistance
Coating	5 Yarns Yellow Polycotton LinerPalm Coated/green Latex
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Building/ Construction/ Carpentry Forestry/ Public Gardens/ Nurseries Waste Collection Transport Industry Car Dismantlers Glass Industry
Weight / Carton	13 kgs
Carton Dimension	
CBM / Carton	
	10 Dozen (120 Pairs)
Origin	China



Gorilla Force I Regular

Palm Coated, Latex (Natural Rubber)		
Standard	CE, CATII EN388:2016 2131X EN420:2003/A1:2009	
Features	 Palm Coated With Ultralight Weight Latex Crinkle Finish Coating Maximum Flexibility & Durability Wrinkle Finish for Extraordinary Dry & Wet Grip High Wear & Tear Resistance Ergonomic Design for a Comfortable Fit Knit Wrist Cuff & Breathable Back 	
Coating	13 Gauge Red PolyesterBlack Crinkled Latex Palm Coated	
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL	
Applications	 Building/Construction/Carpentry Forestry/Public Gardens/Nurseries Waste Collection Transport Industry Scaffolding Applications 	
Weight / Carton	21.40 kgs	
Carton Dimension	47 x 25 x 43 cms	
CBM / Carton		
	20 Dozen (240 Pairs)	
Origin	China	



Gorilla Force II Premium

dorma i orce 11 Fremium		
Palm C	oated, Latex (Natural Rubber)	
Standard	CE, CATII EN388:2016 2131X EN420:2003/A1:2009	
Features	 Palm Coated With Ultralight Weight Latex Crinkle Finish Coating Maximum Flexibility & Durability Wrinkle Finish for Extraordinary Dry & Wet Grip High Wear & Tear Resistance Ergonomic Design for a Comfortable Fit Knit Wrist Cuff & Breathable Back 	
Coating	13 Gauge Red PolyesterBlack Crinkled Latex Palm Coated	
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL	
Applications	 Building/Construction/Carpentry Forestry/Public Gardens/Nurseries Waste Collection Transport Industry Scaffolding Applications 	
Weight / Carton	21.40 kgs	
Carton Dimension	47 x 25 x 43 cms	
CBM / Carton		
	20 Dozen (240 Pairs)	
Origin	China	



Gorilla Rock I Regular

Palm C	oated, Latex (Natural Rubber)
Standard	CE, CATII EN388:2016 2131X EN420:2003/A1:2009
Features	 Palm Coated With Thick Latex High Breathable Back Excellent Dry & Wet Grip High Tear Resistance Inexpensive Model
Coating	2-Py Dark Grey Polycotton Palm CoatedGrey Crinkled Latex
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Building/construction/shipbuilding Packing/shipping/inspection General Maintenance/Assembly Automotive Industry Car Dismantlers
Weight / Carton	11.80 kgs
Carton Dimension	51 x 25 x 35 cms
CBM / Carton	
	10 Dozen (120 Pairs)
Origin	China



Gorilla Rock II Premium

Palm Coated, Latex (Natural Rubber)		
Standard	CE, CATII EN388:2016 2131X EN420:2003/A1:2009	
Features	 Palm Coated With Thick Latex High Breathable Back Excellent Dry & Wet Grip High Tear Resistance Inexpensive Model 	
Coating	2-Ply Yellow Polycotton Palm CoatedOrange Crinkled Latex	
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL	
Applications	 Building/construction/shipbuilding Packing/shipping/inspection General Maintenance/Assembly Automotive Industry Car Dismantlers 	
Weight / Carton	11.80 kgs	
Carton Dimension	51 x 25 x 35 cms	
CBM / Carton		
Packing / Carton	10 Dozen (120 Pairs)	
Origin	China	



Gorilla Defender I

3/4 Coated, NBR (Nitrile Butadiene Rubber)		
Standard	CE, CATI, EN420, IOS 9001:2000	
Features	 Double Dip Liquid Repellant Nitrile Coating On The Palm, Finger & Knuckles Extra Nitrile Coating on The Palm That Provides Extra Grip In Wet, Dry & Oily Conditions Excellent Abrasion Resistance. High Protection From Liquids up to Knuckle Area Lightweight, Comfortable, Flexible With Non-slippery Finish & Knit Wrist Cuff 	
Coating	13 Gauge Black Polyester Shell3/4 Blue Nitrile + Black Sandy Nitrile Coated	
Binding / Sizes	Black / 10/XL	
Applications	 Light & Precision Handling Quality Control & Finishing Work General Maintenance/Assembly Handling of Abrasive Objects in the Presence of Oil & Grease Hydraulics/Wood Working Light Metal Carpentry 	
Weight / Carton	8 kgs	
Carton Dimension	57 x 29 x 27 cms	
CBM / Carton		
	10 Dozen (120 Pairs)	
Origin	China	



Gorilla Flex Oil I

doring rick on 1		
Lightweight, Oil & Water-repellent		
Standard	CE, Cat. II EN388:2016 3121X EN420:2003/A1:2009	
Features	 Eco-Friendly, Breathable, Touch Screen Encapsulated Air Pockets Provide High Resistance to Wear & Tear Lightweight for All-Day Wear Vibration Absorption Excellent Wet Grip HPT® Coating 	
Coating	HPT® Coating	
Liner	15gg Ingenia™- Blend Liner	
Length	24 cm	
Sizes	Medium, Large, XLarge	
Applications	 Automotive Assembly Warehousing General Purpose Materials Handling & Assembly Precision-based Applications Shipping & Receiving 	
Weight / Carton	7.4 Kgs	
Carton Dimension	42 x 29 x 33 cms	
CBM / Carton		
Packing / Carton		
Origin	Pakistan	



Gorilla Extreme I

3/4 Coated, NBR, Jersey (Nitrile Butadine Rubber)

3/4 Coated, NBR, Jersey (Nitrile Butadine Rubber)		
Standard	CE, CATII EN388:2016 3111X EN420:2003/A1:2009	
Features	 Palm, Finger & Knuckle Coated N.B.R. Coating Provides Excellent Resistance to Solvents, Hydrocarbons & Its Derivatives Oils & Grease Excellent Resistance to Abrasion Cotton Canvas Safety Cuff for Protection Jersey Lining for Comfort & Sweat Absorption Protection Against Heavy Duty Jobs 	
Coating	Jersey Liners With Safety CuffBlue Nitrile 3/4 Coated	
Binding / Sizes	Large, XLarge	
Applications	 Road Construction General Maintenance Waste Collection/Forestry Mechanical Engineering Processing of Metals, Steel Bars 	
Weight / Carton	14 kgs	
Carton Dimension	70 x 27 x 37 cms	
CBM / Carton		
	10 Dozen (120 Pairs)	
Origin	China	



Gorilla Extreme II

Full Nitrile Dippe	d Jerse	v (Heavy	Weig	ht Nitrile)
I WII I THUI IIO DIPPO	4 00100	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		

Full Nitrile Di	pped Jersey (Heavy Weight Nitrile)
Standard	CE, CATII EN388:2016 3111X EN420:2003/A1:2009
Features	 The Gloves Have a Heavy Weight Nitrile Full Coated The Inner is a 100% Jersey With a Cotton Wristing Canvas Safety Cuff The Gloves Are Excellent for All Round General Handling Situations
Coating	Jersey Liner, Safety cufV9900 Series Nitrile Smooth Coating, Blue
Length	26 cm
Sizes	Medium, Large, XLarge
Applications	 Cargo Handling Handling Boxes Recycling Industrial Manufacturing Mechanical Warehousing
Weight / Carton	20.30 kgs
Carton Dimension	56 x 45 x 33 cms
CBM / Carton	0.0832
Packing / Carton	12 Dozen (144 Pairs)
Origin	Bangladesh



Gorilla Cut 5 PU

Cut5 (ISO C), Palm Coated, PU (Cut Resistant)
Standard	CE, CATII EN388:2016 4X43C EN420:2003/A1:2009
Features	 HDPE Fibers In The Lining Ensures Excellent Cut Resistance With Reduced Thinness For Good Dexterity Palm Coated With Polyurethane Excellent Mechanical Resistance & Durability + Flexibility Ergonomic Design for Comfortable Fit Knit Wrist Cuff With Breathable Back
Coating	Grey HPPE Gloves Liner/Grey PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Handling Small, Sharp-edged Items Automotive Industry, Metal Fabrication Assembly of Dry Components Photo Labs Electrical Components Etc
Weight / Carton	9 kgs
Carton Dimension	55 x 26 x 26 cms
CBM / Carton	
	10 Dozen (120 Pairs)
Origin	China



Gorilla CUT 5 Microfoam

Cut5 (ISO C), Palm Coated, Nitrile, MicroFoam

Standard	42 x 2CE, CATII EN388:2016 4544C EN420:2003/A1:2009
Features	 Palm Coated With Special Microfoam Nitrile Offers Durability, Dexterity & Tactile Sensitivity Maximum Cut Protection Level Excellent Grip in Both Dry & Oily Environment 365-Degree Breathability Breathable Coating & Breathable Liner High Level of Flexibility
Coating	Grey U2 Weave HPPE Glove LinersBlack Microfoam Nitrile Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Glass Industry Plastic Material Injection & Molding Metal Working Industry Metal Carpentry Automotive Industry
Weight / Carton	10.50 kgs
Carton Dimension	58 x 26 x 28 cms
CBM / Carton	
	10 Dozen (120 Pairs)
Origin	China



Gorilla CUT 5 Nitrile

Cut5 (ISO	D), Palm Coated, Nitrile, Sandy
Standard	CE, CATII EN388:2016 4X44D EN420:2003/A1:2009
Features	 Palm Coated With Sandy Nitrile for Superior Grip + Increased Anti Slip Effect Maximum Dexterity, Sensitivity & Touch Breathable Liner Allows Keep Hands Dry Good Abrasion & Wear Resistance High Cut Resistance
Coating	Grey HPPE Glove LinersBlack Sandy Nitrile Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Machining & Assembly Handling Small, Sharp-Edged Items Abrasive Materials Etc. Automotive Industry Metal Fabrication
Weight / Carton	10.47 kgs
Carton Dimension	58 x 26 x 28 cms
CBM / Carton	
Packing / Carton	,
Origin	China



Gorilla Flex Cut 4/D

High Level	of Cut Resistance, Superior Grip	
Standard	CE, Cat. II EN388:2016 4X42D ANSI A4 CUT	
Features	 Polyester/steel/nylon/spandex Liner Excellent Grip in Dry, Wet Conditions High Abrasion Resistance Soft, Breathable & Flexible Low-particulate Shedding Comfort & Dexterity Ergonomically Designed 	
Coating	 Dextec™ Coating Polyester, Steel. Nylon, Spandex Liner 	
Sizes	Medium, Large, XLarge	
Applications	Glass OperationHandling Stationary BladesAuto ManufacturingCeramics Industries	
Weight / Carton	10.55 kgs	
Carton Dimension	59 x 32 x 32 cms	
CBM / Carton		
	10 Dozen (120 Pairs)	
Origin	Pakistan	



Gorilla Chem I

Green, Nitrile, F	Flocklined, 15mil(Chemical Resistant)	
Standard	CE, CATII EN388:2016 3102X EN420:2003/A1:2009	
Features	 Cotton Flock Lining Absorbs Perspiration & Improves Comfort Good Barrier for Handling Solvents, Oil Based Chemical Agents, Oils, Animal Fats, Oil Derivatives Nonslip Pattern for Extra Grip Excellent Abrasion Resistance 	
Coating	Green Nitrile Glove, Thickness15 Mil(0.38mm), Length: 30cm	
Sizes	Medium, Large, XLarge	
Applications	 Chemical Industry Food Industry Refineries Printing Industry/Publishing Production And Application of Pants & Varnishes, Degreasing Handling/assembly of Oily Parts 	
Weight / Carton	9 kgs	
Carton Dimension		
CBM / Carton		
Packing / Carton	, ,	
Origin	China	



Gorilla Chem II

Gorilla Cr	Gorilla Chem II	
15mill (0.0	38mm) Flock Lined Nitrile Glove	
	ASTM D4679-02 (Re-approved 2015) EN 420:2003+AI:2009 EN 388:2016 4001X EN ISO 374-5:2016 EN ISO 374-1:2016 21CFR 177.2600	
	 Nitrile Rubber Glove, Washed Comfortable, Reusable Fingertip Precision, Good Dexterity Good Grip - Reverse Lozenge Grip Pattern Good Solvent Resistance Reduced Risk of Allergic Reactions Free of Extractable Proteins Silicon Free 	
	Medium, Large, XLarge	
Applications	 Printing Industry, Petrochemical Industry Metal Fabrication, Chemical Processing, Oil Refining, Cleaning & Degreasing Chemical Plants & Transportation Food Processing/Food Handling 	
	12.40 kgs	
	38 x 30 x 30 cms	
	0.0342	
	12 Dozen (144 Pairs) Sri Lanka	
	SII Laiika	



Gorilla Shield I

Double Dipped PVC Coated Glove

Double Dipped PVC Coated Glove		
Standard	CE, CATI	
Features	 Double Dipped PVC Coated Glove PVC Gloves Provides Excellent Barrier Against Acid, Bases, Cutting Oils, Oils & Derivatives Provides Excellent Resistant to Abrasion Good Mechanical & Chemical Protection, Even In Very Humid Conditions Extremely Durable & Wear Resistant Sandy Finish for Excellent Grip Interlock Cotton Lining for Comfort & Sweat Absorption Length: 40cm Resistant & Flexible at Low Temperatures 	
Coating	Sandy PVC Glove, Jersey, Gauntlet, 40cm	
Sizes	10 XL	
Applications	 Chemical/Petro Chemical Industry Oil Refining/chemical Refining Plants Machining Handling Oils, Acids, Caustics & Alcohols Janitorial Activities 	
Weight / Carton	13 kgs	
Carton Dimension	41 x 28 x 46 cms	
CBM / Carton		
	6 Dozen (72 Pairs)	
Origin	China	



Gorilla Shield II

PVC Double Dip, 40cm length

	o Double Dip, reem length	
Standard	CE, CATIII EN388:2016 4121X EN ISO 374-1:2016/TYPE A - AKLMPST EN ISO 374-5:2016 - VIRUS EN420:2003/A1:2009	
Features	 Tough Flexible PVC Coating With Additional Granular Coating on Hand Portion to Confer Excellent Grip In Wet & Dry Applications Increased Thickness Gives Additional Wear & Abrasion Resistance Ideally Suited for General Handling 	
Coating	C Shield Plus 500PVC Double Dip Coated Cotton Lined Gauntlets	
Sizes	Medium, Large, XLarge	
Applications	AutomotiveAssemblyMechanicalGeneral IndustryElectronicsIndustrial Manufacturing	
Weight / Carton	21.73 kgs	
Carton Dimension	41 x 41 x 31 cms	
CBM / Carton	0.0521	
Packing / Carton	, ,	
Origin	Bangladesh	



Gorilla Shield Lite II

PVC Single Dip, 40cm length	
Standard	CE, CATII EN388:2016 4111X EN420:2003/A1:2009
Features	 General Purpose Handling Glove Tough Flexible Smooth PVC Coating Will Withstand Abrasion in Dry Handling Conditions Flared Gauntlet for Ease Of Removal Actifresh or Sanitized Treated to Provide Some Protection Against Organisms Which Give Rise to Bad Odour & Cross Infection
Coating	 Smooth Shield 50 Gauntlet Series B-200-50-G Gauntlets Pvc Fully Coated Cotton Lined Gauntlet
Sizes	Medium, Large, XLarge
Applications	 Cargo Handling Handling Boxes Recycling Industrial Manufacturing Mechanical Warehousing
Weight / Carton	18.28 kgs
Carton Dimension	41 x 41 x 31 cms
CBM / Carton	
	6 Dozen (72 Pairs)
Origin	Bangladesh



Gorilla Flex Chem I

Ultimate in Chemical Resistance CE. Cat. III EN388:2016 4131X Standard EN ISO 374-1:2016/TYPE A AKLMPT EN ISO 374-5:2016 EN374-4:2013 - EN420:2003/A1:2009 • Ultra-soft & Flexible Chemical Resistant Unique Textured Bi-Polymer Coating Exceptional Grip in Wet & Dry Features Ergonomic Hand Shape Ergonomic Design Low Risk of Particle Shedding Coating 15 gg Nylon Liner Bi-polymer coating finish Sizes Medium, Large, XLarge Chemical Handling Agrochemicals Agriculture/Harvesting **Applications** Fishing Household Cleaning

Industrial Painting

Weight / Carton 14.74 kgs Carton Dimension 42 x 40 x 42 cms CBM / Carton 0.0705

Packing / Carton 6 Dozen (72 Pairs) Origin Pakistan



5 Fingers Metal Chain Glove		
Standard	CE, EN 1082-1	
Features	 5 Fingers Metal Mesh Glove With Textile Strap & Elastic Grip Improved Cleanliness & Sanitation Properties Flexibility & Durability Reduced Bacteria Retention Improved Comfort & Fit, Extreme Cut & Puncture Resistant Non Corrosive & Appropriate For Wet Environments 21 Cfr Compliant 	
Sizes	Small - White Cuff Medium - Red Cuff Large - Blue Cuff	
Applications	Meat ProcessingSheet Metal Cutting/HandlingCarpentryTextile Cutting	
Weight / Carton	12.50 kgs	
	53.50 x 23 x 19 cms	
CBM / Carton		
	50 Packets (50 Pieces)	
Origin	China	



Kong Original Impact Gloves		
Standard	CE, EN 388:4242, Category 2	
Features	 Co-Developed By The Oil & Gas Industry's Safety Committee KONG® Knuckle Protection: 90% Impact Absorption 25% More Abrasion Resistant Than Normal Synthetic Leather 76.4% Impact Absorption Offers Sidewall & Complete Fingertip Protection KONG® Metacarpal Protection: 80% Impact Absorption High Contrast Palm / Back of Hand 	
Applications	 Oil & Gas Drilling Extraction & Refining Fracking, Tool Pushing Mining, Demolition Heavy Construction Rigging 	
Weight / Carton	17 kgs	
Carton Dimension	57.5 x 50.5 x 39.5 cms	
CBM / Carton	0.1146	
Packing / Carton		
Origin	Indonesia	







Kevlar Arm / Hand Protection		
Standard	ISO 9001:2008	
Length	22inch With Thumb-Hole	
Features	 Double Ply 100% Dupont™ Kevlar® Brand Fiber Cut Resistant Sleeves Good Cut Protection & Heat Resistance Properties Thumb Slot, Flared Forearm 	
Applications	 Assembly and finishing Sheet metals and metalwork Body assembly Stamping operations Assembly of white goods Glass repair 	
Weight / Carton	15.77 kgs	
Carton Dimension	35 x 66 x 35 cms	
CBM / Carton	0.08085	
Packing / Carton	100 Pairs	
Origin	Pakistan	



Viking TG

Kevlar® / Steel, 7gg, 64 Grams, Cut 5 Glove		
Standard	EN388:3521 EN407:X1XXXX	
Features	 Effective Protection, for Brief Instants From the Heat By Contact (Max. 100 °C) Resistance for Limited To Open Frames Excellent Dexterity & Tactility Knit Wrist Cuff Lightweight 	
Applications	 Suitable For Sharp & Abrasive Work Chassis Assembly, Body Trimming Seizing Structural & Body Parts Inspection (Picking, Checking & Marking) 	
Weight / Carton	3.90 kgs	
Carton Dimension	46 x 41 x 20 cms	
CBM / Carton	0.03772	
Packing / Carton	50 Pairs	
Origin	Pakistan	



Tough Guard

rough oddra		
Cut 5	High Heat 300 Degree Glove	
Standard	EN388:2543 EN407:X3XXXX	
Features	 Knitting: Seamless 7gg Double Glove Outer Shell: 5 Ply 100% Kevlar® +Glass Filament Inner Shell: 100% Cotton Ring Spun Yarn Shell Weight: 300 G / Pair Sizes: L - XL 	
Applications	 Steel Works, Foundries Metal Works & Workshops Bakeries/ Ovens Furnaces & Kilns Glass, Ceramics, Cement Industries 	
Weight / Carton	3.90 kgs	
Carton Dimension	46 x 41 x 20 cms	
CBM / Carton	0.03772	
Packing / Carton		
Origin	Pakistan	

















Driver Gloves

Full Grain Premium Driver Gloves		
Standard	CE CAT 1	
Features	 Size: 10.5inch Wing Thumb Full Grain Leather Durable, Flexible Excellent Comfort Breathable, Long-wearing It Has Excellent Dexterity & High Mechanical Resistance 	
Applications	 General Maintenance Building / Construction Warehousing / Logistics Automotive industry Transportation 	
Weight / Carton	12.62 kgs	
Carton Dimension	61 x 25 x 26 cms	
CBM / Carton		
Packing / Carton	10 Dozen (120 Pairs)	
Origin	Pakistan	

TIG Welding Gloves

Premium A+	Grain & Split Leather
Standard	CE CAT 1
Features	 Size: 14inch Wing Thumb Full Grain Leather Durable, Flexible, Excellent Comfort Breathable, Long-wearing, It Has Excellent Dexterity & High Mechanical Resistance
Applications	General MaintenanceTIG/MIG WeldingDo it yourself
Weight / Carton	22.64 kgs
Carton Dimension	59 x 37 x 33 cms
CBM / Carton	0.072
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan

3602 - Freezer

Freezer Glove	Freezer Gloves With Fleece Flinning		
Standard	CE Cat. I, EN 388		
Features	 Size: 10.5inch Straight Thumb Full Grain Leather Polyester Fleece Linning to Resist Cold Durable, Flexible Excellent Comfort Breathable, Long-wearing It HasExcellent Dexterity & High Mechanical Resistance Elastic Knit Wrist 		
Applications	Freezer & Cold StorageFood Handling		
Weight / Carton	8.10 kgs		
Carton Dimension	28 x 83 x 26 cms		
CBM / Carton	0.0604		
Packing / Carton	100 pairs		
Origin	Pakistan		

3601- Freezer

2001- LIE		
Freezer Gloves With Fleece Flinning		
Standard	CE Cat. I, EN 388	
Features	 Size: 10.5inch Straight Thumb Full Grain Leather Polyester Fleece Linning to Resist Cold Durable, Flexible Excellent Comfort Breathable, Long-wearing It Has Excellent Dexterity & High Mechanical Resistance Elastic Knit Wrist 	
Applications	 Cold Environment Handling Cold Objects General Maintenance Building / Construction Warehousing / Logistics 	
Weight / Carton	11 kgs	
Carton Dimension	28 x 83 x 26 cms	
CBM / Carton		
Packing / Carton	•	
Origin	Pakistan	







1001H-YW/ASK-2014

141	Wolding Clave Hookey Dolm
Leatner	Welding Glove, Hockey Palm
Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X
Features	 Welding Glove Hockey Palm Cow Split Leather Cotton Lined on Palm Canvas lining Inside on the Cuff Wing Thumb Colour:Yellow Size:16
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	28.50 kgs
Carton Dimension	40.66 x 33 x 56 cms
CBM / Carton	0.075
Packing / Carton	5 Dozen (60 Pairs)
Origin	Pakistan







Leather \	Welding Glove, Kevlar Stitched
Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X
Features	 Welding Glove Kevlar Stitched Cow Split Leather Cotton Lined on Palm Canvas lining Inside on the Cuff Wing Thumb Colour:Golden Size:16"
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	28 kgs
Carton Dimension	40.66 x 33 x 56 cms
CBM / Carton	
Packing / Carton	5 Dozen (60 Pairs)
Origin	Pakistan





1001-RD/ASK-2014 RD

TOOT-KD	1001-KD/ASK-2014 KD		
Leather	Welding Glove without Piping		
Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X		
Features	 Welding Glove Cow Split Leather Cotton Lined on Palm Canvas lining Inside on the Cuff Wing Thumb Colour:Red Size:16" 		
Applications	ConstructionUtilityEngineeringManufacturingAutomotive		
Weight / Carton	31 kgs		
Carton Dimension	40.66x33x67.30 cms		
CBM / Carton			
Packing / Carton			
Origin	Pakistan		









AMPRIL TOOS-FL/100-Extra procedula Manual S (C)

AMERIZA

1001W-RD/ASK-2014 RD

Leather Welding Glove, Welted Seams	
Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X
Features	 Welding Glove Welted Seams Cow Split Leather Cotton Lined on Palm Canvas lining Inside on the Cuff Wing Thumb Colour:Red Size:16"
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	27 kgs
Carton Dimension	40.66 x 33 x 56 cms
CBM / Carton	
Packing / Carton	
Origin	Pakistan

1002-OR/1034

Leather Rigger Glove, Single Palm	
Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2009
Features	 Cow Split Leather Single Palm Economy Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Orange Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	28 kgs
Carton Dimension	28 x 28 x 78.74 cms
CBM / Carton	0.0617
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan

1005-FL/1026

1005 1 1/	1020
Leathe	er Rigger Glove, Single Palm
Standard	CE Cat. II EN 388:2016 4133X EN 420:2003 +A1:2010
Features	 Cow Split Leather Single Palm Premium Ref. Tape Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Fluorescent Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	18.5 kgs
Carton Dimension	40.5 x 26.5 x 43 cms
CBM / Carton	
Packing / Carton	
Origin	Pakistan











1006-NT/ASK-1001

Leather Rigger Glove, Double Palm	
Standard	CE Cat. II EN 388:2016 4244X EN 420:2003 +A1:2010
Features	 Cow Split Leather Double Palm Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Natural Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	20 kgs
Carton Dimension	44.50 x 26.50 x 43 cms
CBM / Carton	
Packing / Carton	6 Dozen (72 Pairs)
Origin	Pakistan

1006-YW/ASK-1001

Leather Rigger Glove, Double Palm	
Standard	CE Cat. II EN 388:2016 4244X EN 420:2003 +A1:2010
Features	 Cow Split Leather Double Palm Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Yellow Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	29 kgs
Carton Dimension	28 x 28 x 83.80 cms
CBM / Carton	
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan

1007-RD/1026

TOO1-KD	100/-KD/ 1020	
Leather Rig	gger Glove, Single Palm Premium	
Standard	CE Cat. II EN 388:2016 4133X EN 420:2003 +A1:2009	
Features	 Cow Split Leather Single Palm Premium Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Red Size:10.5 	
Applications	ConstructionUtilityEngineeringManufacturingAutomotive	
Weight / Carton	17 kgs	
Carton Dimension	40.5 x 26.5 x 43 cms	
CBM / Carton		
Packing / Carton	, ,	
Origin	Pakistan	















1008-GR/1034

Leathe	Leather Rigger Glove, Single Palm	
Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2011	
Features	 Cow Split Leather Single Palm Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Green Stripes Size:10.5 	
Applications	ConstructionUtilityEngineeringManufacturingAutomotive	
Weight / Carton	17 kgs	
Carton Dimension	40.5 x 26.5 x 43 cms	
CBM / Carton	0.0461	
Packing / Carton	6 Dozen (72 Pairs)	
Origin	Pakistan	

1009-YW/1034

Leath	Leather Rigger Glove, Patch Palm		
Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2010		
Features	 Cow Split Leather Patch Palm Economy Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Yellow Size:10.5 		
Applications	ConstructionUtilityEngineeringManufacturingAutomotive		
Weight / Carton	28 kgs		
Carton Dimension	28 x 28 x 83 cms		
CBM / Carton	0.065		
Packing / Carton	10 Dozen (120 Pairs)		
Origin	Pakistan		

Hotmill Gloves

Thermal	Protection up to 250°C
Standard	CE, CATII EN388:1222 EN407:02XXXX
Features	 FR Coated Gloves Cut & Sewn 100% Cotton Protect Against Heat 6 oz Flannel Sandwiched Between Two 13 oz Layers
Compliances	REACHB-Contact heat 250 Temp(°C)Protect Against Heat
Applications	Aluminum FoundriesHot Metal Works.Heat PressingsMetal Mouldings
Weight / Carton	21.10 kgs
Carton Dimension	62 x 38 x 39 cms
CBM / Carton	
Packing / Carton	6 Dozen (72 Pairs)
Origin	Pakistan













Blue KNDDA

Double S	ide Dotted Gloves Blue KNDDA
Standard	EN 388 : 2003
Features	 Knitted on 10guage Machine Durable T/C Yarm Double Side Blue PVC Dots Knitted Wrist With Overlock Tiger Paw & Parallel Dots for Extra Grip & Comfort
Color	Navy Blue
Applications	 Multipurpose Reusable Gloves Engineering Automobile Battery Working With Molten Metals Cement Petrochemicals Ferrous & Non-ferrous Metallurgical Industries Fertilizer Foundries
Origin	China / Pakistan

Blue KNSDA

Single Side Dotted Gloves Blue KNSDA	
Standard	EN 388 : 2003
Features	 Knitted on 10guage Machine Durable T/C Yarm Double Side Blue PVC Dots Knitted Wrist With Overlock Tiger Paw & Parallel Dots for Extra Grip & Comfort
Color	Navy Blue
Applications	 Multipurpose Reusable Gloves Power Generation Sanding Tyre Manufacturing Construction Coal Industries Pharmaceutical Chemical
Origin	China / Pakistan

Drill Dotted Gloves

8	/ 10 / 12 / 14 / 16 Ounce
Standard	CE CAT 1
Features	 Cotton With PVC Dots Knitted Wrist Seals Out Dirt & Debris PVC Polka Dots Provides Superior Grip in Dry Conditions for Safe & Secure Handing Comfort
Weight	8 / 10 / 12 / 14 / 16 Ounce
Applications	 General Purpose Maintenance Manufacturing Warehouse Operation Parts Handling etc
Weight / Carton	19.60 kgs
Carton Dimension	54 x 22 x 52 cms
CBM / Carton	0.0618
	25 Dozen (300 Pairs)
Origin	Pakistan















Cotton BW400

Bleach	White Cotton Knitted Gloves
Standard	CE CAT I
Features	Knitted on 7 Gauge MachineDurable T/c YarmKnitted Wrist With White OverlockMinimum Lint
Weight	400 Grams
Applications	 Multipurpose Reusable Gloves Ceramics Dyes & Dyestuffs Glass Etching Grinding Paper Processing Paints & Pigments
Weight / Carton	9.80 kgs
Carton Dimension	44 x 25 x 50 cms
CBM / Carton	0.055
Packing / Carton	20 Dozen (240 Pairs)
Origin	Pakistan

Cotton BW600

Cotton Birooc	
Bleach	White Cotton Knitted Gloves
Standard	CE CAT I
Features	Knitted on 7 Gauge MachineDurable T/c YarmKnitted Wrist With White OverlockMinimum Lint
Weight	600 Grams
Applications	 Multipurpose Reusable Gloves Ceramics Dyes & Dyestuffs Glass Etching Grinding Paper Processing Paints & Pigments
Weight / Carton	13.65 kgs
Carton Dimension	55 x 44 x 27 cms
CBM / Carton	
Packing / Carton	20 Dozen (240 Pairs)
Origin	Pakistan

Cotton BW840

Cotton Di	WO-TO
Bleach	White Cotton Knitted Gloves
Standard	CE CAT I
Features	Knitted on 7 Gauge MachineDurable T/c YarmKnitted Wrist With White OverlockMinimum Lint
Weight	840 Grams
Applications	 Multipurpose Reusable Gloves Ceramics Dyes & Dyestuffs Glass Etching Grinding Paper Processing Paints & Pigments
Weight / Carton	18.90 kgs
Carton Dimension	48 x 26 x 60 cms
CBM / Carton	0.07488
Packing / Carton	20 Dozen (240 Pairs)
Origin	Pakistan



HDPE Gloves

0.6g	, Transparent
Standard	CE CAT 1
Features	 Light Weight, Durable Resist Tearing Latex Free Easy Application & Remove of Glove From Hand Seamless & Ambidextrous Material: HDPE Style: Powder Free Color: Transparent Size: Universal
Applications	Manufacturing & Food Processing Handling, Hygiene
Weight / Carton	6 kgs
Carton Dimension	37 x 27 x 17 cms
CBM / Carton	0.017
Packing / Carton	100 Bags
Origin	China



PP Sleeves	
Arm Sleev	es with Elastic Cuff
Standard	CE CAT 1
Features	 Protects From Paint Powder, Dirt, Grease & Grime to Keep the Skin Safe Latex Free Elastic Cuff, to Protect Against Contamination Light Weight Safety & Comfort
Material	PP Non-Woven
Weight	20 GSM
Color	Blue
Size	16 Inches
Applications	HospitalJanitorialClean RoomBeauty Salons

Weight / Carton 3.50 kgs Carton Dimension 38 x 26 x 36 cms CBM / Carton 0.0356 Packing / Carton 10 Bags

Origin China




EN ISO 20344* EN 344	Test methods for shoes
EN ISO 20345	Safety shoes with toe cap that withstands impact force up to 200 J and compressions up to 15 kN (S CATEGORY)
EN ISO 20347 EN 347	Work shoes without toe cap (O CATEGORY)
EN ISO 17249	Safety shoes that offer protection against chainsaw cutting
EN ISO 13287	Method for testing resistance to slipping

^{*}PPE certified since 2006

CLASSIFICATION


GLASSIFIGAT	IUI						
TYPE I O SAFETY REQUIREMENTS TYPE II	o Leather shoes a						rubber o
Safety footwear	SB	S1P	S1	S2	S 3	S4	S 5
Safety footwear Working footwear	ОВ	01P	01	02	03	04	05
Base requirements	х	Х	х	х	X	X	X
Slip resistance SR A/B/C*	Х	х	Х	х	х	х	х
Anti-static A	0	Х	X	X	X	X	X
Heel protection against impact E	0	X	X	X	X	X	X
Water penetration and absorption WRU (Applicable Only for Type I shoes)	0	0	0	X	X		
Perforation resistance P	0	х	0	0	х	0	х
Conductivity C	0	0	0	0	0	0	0
Heat insulation HI	0	0	0	0	0	0	0
Cold insulation CI	0	0	0	0	0	0	0
Heat by contact resistance HRO	0	0	0	0	0	0	0
Water resistance WR (Only for Type I shoes)	0	0	0	0	0	0	0
Ankle protection AN	0	0	0	0	0	0	0
Cutting resistance CR	0	0	0	0	0	0	0
Metatarsal protection M	0	0	0	0	0	0	0
(Only for safety shoes)							
Hydrocarbons resistance FO (Optional for all the categories of working)	0	X	x	X	X	X	X
footwear and for the SB category, base or all the other categories of safety foot	requi				- 1		








Best Run

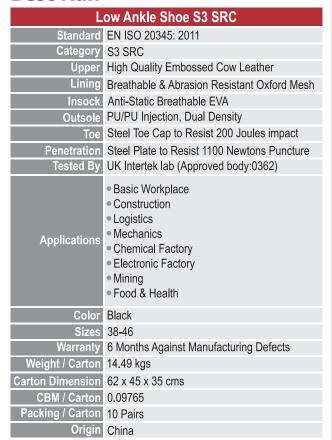





Best Sport

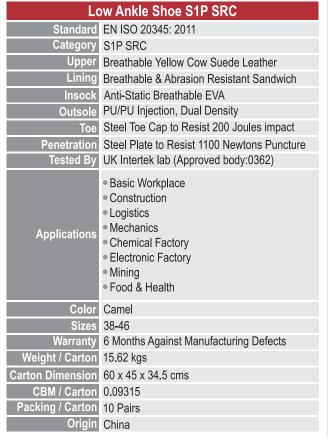



Best Jogger

Dest sogget		
Lo	ow Ankle Shoe S1P SRC	
Standard	EN ISO 20345: 2011	
Category	S1P SRC	
Upper	Breathable Blue Cow Suede Leather	
Lining	Breathable & Abrasion Resistant Sandwich	
Insock	Anti-Static Breathable EVA	
Outsole	PU/PU Injection, Dual Density	
Toe	Composite Toecap to Resist 200 Joules Impact	
Penetration	Flexible Kevlar Sole	
Tested By	UK Intertek lab (Approved body:0362)	
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health 	
Color	Blue	
Sizes	38-46	
Warranty	6 Months Against Manufacturing Defects	
Weight / Carton	14.74 kgs	
Carton Dimension	60 x 44 x 34 cms	
CBM / Carton	0.08976	
Packing / Carton	10 Pairs	
Origin	China	



Best Workman

	Low Ankle Shoe S1P
Standard	EN ISO 20345: 2011
Category	S1P
Upper	High Quality Water Resistant Cow Leather
Lining	Breathable BK Air Mesh
Insock	Breathable EVA Insock
Outsole	PU/PU injection, Dual Density
Toe	Steel Toecap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	By UK Intertek Lab (Approved Body:0362)
Applications	 Basic Workplace Construction Logistics Mechanics Glasses Installation Farming Gardening Car Repair Shop
Color	Black
	38-46
Warranty	
Weight / Carton	-
Carton Dimension	
CBM / Carton	
Packing / Carton	
Origin	China



Best Climber

High Ankle Shoe S1P			
Standard	EN ISO 20345: 2011		
Category	S1P		
Upper	High Quality Suede Cow Leather		
Lining	Breathable & Abrasion Resistant Sandwich		
Insock	Anti-Static Breathable EVA Insock		
Outsole	PU/PU injection, Dual Density		
Toe	Composite Toecap to Resist 200 Joules Impact		
Penetration	Kevlar Plate to Resist 1100 Newtons Puncture		
Tested By	By UK Intertek Lab (Approved Body:0362)		
Applications	 Basic Workplace Construction Logistics Mechanics Glasses Installation Farming Gardening Car Repair Shop 		
Color	Black		
	38-46		
Warranty	6 Months Against Manufacturing Defects		
Weight / Carton	_		
Carton Dimension			
CBM / Carton			
Packing / Carton			
Origin	China		



Best Boy

High Ankle	Shoe with Side Reflectors S3 SRC
Standard	EN ISO 20345: 2011
Category	S3 SRC
Upper	High Quality Embossed Cow Leather
Lining	Breathable & Abrasion Resistant Sandwich
Insock	Anti-static & Breathable EVA
Outsole	PU/PU Injection, Dual Density
Toe	Steel Toe Cap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body:0362)
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health
Color	Black
Sizes	38-46
Warranty	6 Months Against Manufacturing Defects
Weight / Carton	15.96 kgs
Carton Dimension	61.5 x 44 x 34 cms
CBM / Carton	0.09200
Packing / Carton	10 Pairs
Origin	China




Best Slip-On

High Ankle Laceless Safety Shoes S3 SRC			
Standard	EN ISO 20345: 2011		
Category	S3 SRC		
Upper	Black Cow Smooth Leather		
Lining	Breathable & Abrasion Resistant BK Mesh		
Insock	Anti-static & Breathable EVA		
Outsole	PU/PU Injection, Dual Density		
Toe	Steel Toe Cap to Resist 200 Joules Impact		
Penetration	Steel Plate to Resist 1100 Newtons Puncture		
Tested By	UK Intertek lab (Approved body:0362)		
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health 		
Color	Black		
Sizes	38-46		
Warranty	6 Months Against Manufacturing Defects		
Weight / Carton	15.78 kgs		
Carton Dimension	62.5 x 49 x 36 cms		
CBM / Carton			
Packing / Carton			
Origin	China		





Best Worker

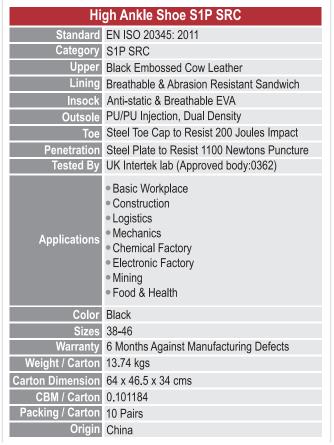





Best Welder

Pinner Park 00 0PO			
Rigger Boot S3 SRC			
Standard	EN ISO 20345: 2011		
Category	S3 SRC		
Upper	Brown Cow Palm Embossed Leather		
Lining	Breathable & Abrasion Resistant Sandwich		
Insock	Antistatic & Breathable EVA		
Outsole	PU/PU Injection, Dual Density		
Toe	Steel Toe Cap to Resist 200 Joules Impact		
Penetration	Steel Plate 1100 to Resist Newtons Puncture		
Tested By	UK Intertek lab (Approved body:0362)		
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health 		
Color	Brown		
Sizes	38-46		
Warranty	6 Months Against Manufacturing Defects		
Weight / Carton	20.54 kgs		
Carton Dimension	72 x 66 x 37 cms		
CBM / Carton	0.17582		
Packing / Carton	10 Pairs		
Origin	China		





Shoe Cover

PP Shoe Cover		
Standard	EN CAT 1	
	PP Non-Woven	
Weight	30 GSM	
Features	 Extra Thick Provides Lasting Protection, Water Resistant Safe Guard Environment from Contamination Prevents Scuffs on Floor Enhances Traction While Walking Easy on/off Elasticated Shoe Cover 	
Applications	HospitalJanitorialClean RoomIndustrialPharmaceutical Facility	
Color	Blue	
Sizes	15 x 40 cm	
Weight / Carton	4.60 kgs	
Carton Dimension	40 x 27 x 28 cms	
CBM / Carton	0.03	
Packing / Carton	10 Packets (1000 Pieces)	
Origin	China	




Bulldozer

bulldozer		
Fire Fighting Boot - BD9788		
Standard	CSA, CE Approved EN 345-2:1996	
Feature	Vulcanized RubberUpper & SoleHypalon Lacquer FinishingChemical Resistant	
Upper	 Resistant Towards Mild Acids & Alkali 	
Sole	Resistant Towards Mild Acids	
Sole Protection	Black in Colour80% Chloroprene Rubber20% Nitrile RubberOil Resistant	
Steel Toe	Meets EN 345 Impact & Compression	
Color	Black / Yellow	
Sizes	38 - 46	
Weight / Carton	~	
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	Malaysia	

ROLECTION





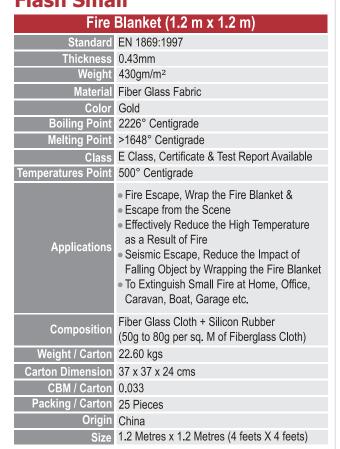



Flash Medium

Fire Blanket (1.2 m x 1.8 m)		
Standard	EN 1869:1997	
Thickness	0.43mm	
Weight	430gm/m ²	
Material	Fiber Glass Fabric	
Color	Gold	
Boiling Point	2226° Centigrade	
Melting Point	>1648° Centigrade	
Class	E Class, Certificate & Test Report Available	
Temperatures Point	500° Centigrade	
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc. 	
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)	
Weight / Carton	22.60 kgs	
Carton Dimension	39 x 37 x 23 cms	
CBM / Carton	0.033	
Packing / Carton	20 Pieces	
Origin	China	
Size	1.2 Metres x 1.8 Metres (4 feets X 6 feets)	



Flash Large

riasii Earge		
Fire	Blanket (1.8 m x 1.8 m)	
Standard	EN 1869:1997	
Thickness		
Weight	430gm/m ²	
Material	Fiber Glass Fabric	
Color		
	2226° Centigrade	
Melting Point	>1648° Centigrade	
Class	E Class, Certificate & Test Report Available	
Temperatures Point	500° Centigrade	
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc. 	
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)	
Weight / Carton	25.30 kgs	
Carton Dimension	37 x 37 x 24 cms	
CBM / Carton	0.033	
Packing / Carton	15 Pieces	
Origin	China	
Size	1.8 Metres x 1.8 Metres (6 feets X 6 feets)	











Flash Small PVC Box

Fire Blanket (1.2 m x 1.2 m)	
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m ²
Material	Fiber Glass Fabric
	White
	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	22.60 kgs
Carton Dimension	37 x 37 x 24 cms
CBM / Carton	0.033
Packing / Carton	20 Pieces
Origin	China
Size	1.2 Metres x 1.2 Metres (4 feets X 4 feets)

Flash Medium PVC Box

Fire Blanket (1.2 m x 1.8 m)		
Standard	EN 1869:1997	
Thickness	0.43mm	
Weight	430gm/m ²	
Material	Fiber Glass Fabric	
Color	White	
Boiling Point	2226° Centigrade	
Melting Point	>1648° Centigrade	
Class	E Class, Certificate & Test Report Available	
Temperatures Point	500° Centigrade	
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc. 	
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)	
Weight / Carton	22.60 kgs	
Carton Dimension	35 x 24 x 38 cms	
CBM / Carton	0.0319	
Packing / Carton	10 Pieces	
Origin	China	
Size	1.2 Metres x 1.8 Metres (4 feets X 6 feets)	

Flash Large PVC Box

_	CIVEDOX
Fire	Blanket (1.8 m x 1.8 m)
Standard	EN 1869:1997
Thickness	
Weight	430gm/m ²
Material	Fiber Glass Fabric
	White
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	25.30 kgs
Carton Dimension	37 x 37 x 24 cms
CBM / Carton	0.033
Packing / Carton	10 Pieces
Origin	
Size	1.8 Metres x 1.8 Metres (6 feets X 6 feets)



Flash 0.4 mm

Fire Roll Made of Fiber Glass Woven Fabric	
Standard	CE AS/NZS 3504-2006
Thickness	0.4mm
Weight	840gm/m ²
Material	Fiber Glass Fabric
Color	White
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	Industrial SafetySteel MillsElectric Arc Welding ProcessBoiler Room SparkWelding Application
Temperature	550 Degree Centigrade, Compact & Portable Highly Flame Resistant, Breaking Strength (N/50mm) Warp:5933; Weft: 4609
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	43.50 kgs
Carton Dimension	105 x 25 x 25 cms
CBM / Carton	0.0656
Packing / Carton	1 Roll
Origin	China
Size	1 Metre Width x 100 Metres Roll Length



Flash 0.8 mm

Fire Roll Made of Fiber Glass Woven Fabric		
Standard	CE AS/NZS 3504-2006	
Thickness	0.8mm	
Weight	840gm/m ²	
Material	Fiber Glass Fabric	
Color	Gold	
Boiling Point	2226° Centigrade	
Melting Point	>1648° Centigrade	
Class	E Class, Certificate & Test Report Available	
Temperatures Point	500° Centigrade	
Applications	Industrial SafetySteel MillsElectric Arc Welding ProcessBoiler Room SparkWelding Application	
Temperature	550 Degree Centigrade, Compact & Portable Highly Flame Resistant, Breaking Strength (N/50mm) Warp:5933; Weft: 4609	
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)	
Weight / Carton	42 kgs	
Carton Dimension	103 x 24 x 24 cms	
CBM / Carton	0.0593	
Packing / Carton	1 Roll	
Origin	China	
Size	(1 Metre Width X 50 Metres Roll Length)	



Flash 1.6 mm

1 10311 1.0 1	11111
Fire Roll Made	e of Fiber Glass Woven Fabric
Standard	CE AS/NZS 3504-2006
Thickness	
Weight	840gm/m ²
Material	Fiber Glass Fabric
Color	
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	Industrial SafetySteel MillsElectric Arc Welding ProcessBoiler Room SparkWelding Application
Temperature	550 Degree Centigrade, Compact & Portable Highly Flame Resistant, Breaking Strength (N/50mm) Warp:5933; Weft: 4609
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	43.50 kgs
Carton Dimension	104 x 24 x 25 cms
CBM / Carton	0.062
Packing / Carton	1 Roll
Origin	China
Size	(1 Metre Width X 25 Metres Roll Length)

EMERGENCY TRS



Matsuda P150

Portable Eye Washer, 9-Gallon		
Standard	EN 15154-4:2009	
Application	 Self-Contained 9-Gallon Gravity Flow Eyewash Unit Uses Gravity to Deliver Water Through Dual Spray Heads The Unit Delivers Over Six Gallons (22.5 Liters) of Water for Fifteen Minutes & is Ideal for Use Where A Continuous Supply of Potable Water Is Not Available, Especially in Remote Plant Areas, Low Traffic And/or Low Hazard Areas 	
Tank	 9-gallon Capacity Safety Yellow Polyethylene Tank Tank has Handles on Top & Side to Allow for Easy Handling A Wide-Fill Opening With A Threaded Cap Permits Easy Inspection, Cleaning, & Filling 	
Operation	 Water Flow is Activated By Pulling Down the Yellow Eyewash Tray Integral Full Flow Nozzles Deliver A Soft Spray of Water Swing Tray Up To A Storage Position to Stop the Flow 	
Drain	 Wastewater is Directed to Discharge Into the Floor Drain A Storage Tank or Other Receptor Could Be Used to Collect Waste Water to Avoid Pollution (Not Included) 	
Mounting	 Stainless Steel Bracket for A Mounting Unit on the Wall The Unit Can Also Be Placed on A Countertop or Other Flat Surfaces 	
Discharge Time	15 Minutes (Minimum) At the Flow Rate of 1.5l/Minutes (Minimum)	



Matsuda

Matsuda P100

	Portable Eye Washer, 16-Gallon
Standard	EN 15154-4:2009
Application	 Self-Contained 16-Gallon Gravity Flow Eyewash Unit Uses Gravity to Deliver Water Through Dual Spray Heads The Unit Delivers Over Seven Gallons (26 Liters) of Water for Fifteen Minutes & is Ideal for Use Where A Continuous Supply of Potable Water Is Not Available, Especially in Remote Plant Areas, Low Traffic And/or Low Hazard Areas
Tank	 16-Gallon Capacity Safety Yellow Polyethylene Tank Tank has Handles on Top & Side to Allow for Easy Handling A Wide-Fill Opening With A Threaded Cap Permits Easy Inspection, Cleaning, & Filling
Operation	 Water Flow is Activated By Pulling Down the Yellow Eyewash Tray Integral Full Flow Nozzles Deliver A Soft Spray of Water Swing Tray Up To A Storage Position to Stop the Flow
Drain	 Wastewater is Directed Into the Drain Opening in the Tank Basin, 3 Ft Long Drain Hose in Basin Directs Discharge into A Floor Drain, Storage Tank, or Other
Mounting	 Stainless Steel Bracket for A Mounting Unit on the Wall The Unit Can Also Be Placed on A Countertop or Other Flat Surfaces
Discharge Time	15 Minutes (Minimum) At the Flow Rate of 1.5l/Minutes (Minimum)







Wal	Mounted Eye Washer, GI
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	 Controlled, Low Velocity Flow Completely Rinses Eyes & Face is Not Injurious to User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne Contaminants Valve Actuator Are Easy to Locate & Readily Accessible to User Hands-Free Stay Open Valve Activate Within One Second Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, & Filter to Remove Impurities from the Water Flow 1/2" Stainless Steel Stay-Open Ball Valve The Valve is Activated By a Flag Handle The Unit Remains in Operation Until the Handle is Returned to the Closed Position 11-1/2" Diameter. Bowl is ABS plastic
Application	 Wall Mounted Eye Washer is Using in Rushing to Deal With An Emergency Quickly Cleaning the Deleterious Material Attached to the Eyes



Matsuda E100

	Eye Washer, GI
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	 Controlled, Low Velocity Flow Completely Rinses Eyes & Face is Not Injurious to User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne Contaminants Valve Actuator Are Easy to Locate & Readily Accessible to User Hands-Free Stay Open Valve Activate Within One Second Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, & Filter to Remove Impurities from the Water Flow 1/2" Stainless Steel Stay-Open Ball Valve The Unit Remains in Operation Until the Handle is Returned to the Closed Position Supply: 1/2" NPT Male Inlet Waste: 1-1/4"NPT Female Outlet
Application	 Free-standing, Pedestal Mounted Eye/Face Wash Water Flow Is Activated By Either a Flag Handle or a Foot Treadle



Matsuda SS-B100

	32-P100
Wal	Mounted Eye Washer, SS
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	 Controlled, Low Velocity Flow Completely Rinses Eyes & Face is Not Injurious to User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne Contaminants Valve Actuator Are Easy to Locate & Readily Accessible to User Hands-Free Stay Open Valve Activate Within One Second Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, & Filter to Remove Impurities from the Water Flow 1/2" IPS Stainless Steel Stay-Open ball valve The Valve is Activated By a Flag Handle The Unit Remains in Operation Until the Handle is Returned to the Closed Position 11-1/2" Diameter. Bowl is Stainless Steel
Application	 Wall Mounted Eye Washer is Using in Rushing to Deal With An Emergency Quickly Cleaning the Deleterious Material Attached to the Eyes



Matsuda S100

Safet	Safety Shower & Eye Washer, Gl		
Standard	EN 15154-1:2006 EN 15154-2:2006		
Features	 Connect Unit to an Uninterruptible Water Supply Capable of Delivering Required Flow When All Components Are Operated Simultaneously Shower Can Provide 76 Liters of Water Per Minute Center of The Water Pattern 16" from Any Obstructions Large Area Cover of Water Flow, At 60", The Water Pattern Cover 20" in Diameter Ball Valve Activates Within One Second Easily Located, Accessible Actuator No Higher Than 69" Controlled, Low-Velocity Flow Completely Rinses Eyes & Face is Not Injurious to the User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne 		
Application	 The Shower is Activated By A Pull Rod & Eyewash is Activated By A Flag Handle or Foot Treadle Two Spray-Type Outlet Heads Deliver A Flood of Water for Rinsing Eyes 		



Matsuda SS-E100

	Eva Wacher SS
	Eye Washer, SS
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	 Controlled, Low Velocity Flow Completely Rinses Eyes & Face is Not Injurious to User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne Contaminants Valve Actuator Are Easy to Locate & Readily Accessible to User Hands-Free Stay Open Valve Activate Within One Second Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, & Filter to Remove Impurities From the Water Flow 1/2" 304 Stainless Steel Stay-Open Ball Valve The Unit Remains In Operation Until the Handle is Returned to the Closed Position 11-1/2" Diameter. Bowl Is Stainless Steel Schedule 1-1/4" & 1/2" Stainless Steel
Application	 Free-standing, Pedestal Mounted Eye/Face Wash Water Flow Is Activated By Either a Flag Handle or a Foot Treadle



Matsuda

Matsuda SS-S100

lacoada	55 5100			
Safety Shower & Eye Washer, SS				
Standard	EN 15154-1:2006 EN 15154-2:2006			
Features	 Connect Unit to an Uninterruptible Water Supply Capable of Delivering Required Flow When All Components Are Operated Simultaneously Shower Can Provide 76 Liters of Water Per Minute Center of The Water Pattern 16" from Any Obstructions Large Area Cover of Water Flow, At 60", The Water Pattern Cover 20" in Diameter Ball Valve Activates Within One Second Easily Located, Accessible Actuator No Higher Than 69" Controlled, Low-Velocity Flow Completely Rinses Eyes & Face is Not Injurious to the User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne 			
Application	 The Shower is Activated By A Pull Rod & Eyewash is Activated By A Flag Handle or Foot Treadle Two Spray-Type Outlet Heads Deliver A Flood of Water for Rinsing Eyes 			





EW-900

Reliwash Saline Eye Wash 500ml

Description

- Mandatory Under HSE Regulations Sterile Safe & Non-Toxic Twist-Seal Cap
- Sodium Chloride 0.9%w/v Ph.Eur





EW-919/F17899

Premier Eyewash Station

- Eye Wash Station Contents:
- 2 Eve Pad Dressings
- Description 2 Eye Wash 500ml Bottles
 - 5 Eye Wash 20ml Pods
 - 1 Mirror





EW-904

Double Eye Wash Station in Aura Box

- Contents: 2pcs 500ml Saline Eye Wash
- Description 2 No.16 Eyepad Dressing
 - Standard Aura 27.5cmH x 27cmW x 9.5cmD





EW-955

Eyewash Station Deluxe Complete

- Content:
- 2 Eye Pad Dressings

- Description 2 Eye Wash 500ml Bottles
 - 1 Bracket





EW-906

Eyewash Station with Content

Description

- Green High Visibility
- Eye Wash Station
- Holds Two 500ml Sterile
- Saline Solution Bottles
- 2 Eye Pad Dressings





Wall Mounted Eyewash Station

Description

- Visible & Readily Available
- Close To The Workplace &
- Immediate Washing May Be Needed





EW-2990

Eyewash Bottle 500ml with Eyebath Cap

Description

- Sodium Chloride 0.9% w/v Ph.Eur.
- Available In 500ml Bottle Suitable For Boxed
- First Aid Kits.





Eye Wash Station

High-Density Green Polyethylene Tank

Description

- Visible & Readily Available
- Easily Mounted on The Wall Close To The Workplace &
- Immediate Washing May Be Needed



RELIANCE MEDICAL 'Leading First Aid' APPROVED

RELIANCE MEDICAL 'Leading First Aid'







FA-330

BS8599-1:2019 Small Workplace Kit

- Low Risk 25 Employees
- High Risk 5 Employees
- Description Compliant to BSI Standard
 - Colour-Coded Carry Case
 - All Content HSE Approved

BS8599-1:2019 Me dium Workplace Kit

- Low Risk 25-100 Employees
- High Risk 5-25 Employees
- Description Compliant to BSI Standard
 - Colour-Coded Carry Case
 - All Content HSE Approved

FA-348

BS8599-1:2019 Large Workplace Kit

- Low Risk 100 Employees
- High Risk 25 Employees
- Description Compliant to BSI Standard
 - Colour-Coded Carry Case
 - All Content HSE Approved

FA-156

SUV First Aid Kit in Stockholm Bag

Description • Larger Capacity for

- Provides for Extended Travel Periods
- Multiple Use
- Kit to Cover Several People

RELIANCE MEDICAL 'Leading First Aid'



APPROVED

FA-343



RELIANCE MEDICAL 'Leading First Aid'



FA-2030

Burns kit in Compact Aura Box

Description

General Purpose Compact Burns Kit, Includes Various Size Burn Dressings Suitable for Smaller Work Environments

RELIANCE MEDICAL 'Leading First Aid'



FA-275

Riga Bum Bag First Aid Bag

- Suitable For Outdoor Walking Trips or Climbing
- Description Fits Around The Waist Lightweight & Not Cumbersome

FA-F30658

BS8599-1 Medium Standard Workplace

Description

Conforms With British Standard BS 8599-1:2019

Application Body Fluid Clean Up Kit

- Everything Required to
- Clean Up in One Simple Pack Description
 - Provides Containment & Disposal in Each Application Meets HSE Requirements



FAW5 (Micro Kit)

First Aid Kit (Upto 5 Persons)

Description

Especially Designed for Travel Use

 With Its Mini Size. It is Fairly Handy When you Take Care of Small Medical Treatment



FAW10 (Auto Kit)

First Aid Kit (Upto 10 Persons)

Perfect for Auto, Home & Office Use

Description • The Kit is Roomy, Durable, Easy to Carry & Simple to Open



FAWB25 (Team Kit)

First Aid Kit (upto 25 Persons)

Description

- Cleaning & Covering Small Wounds, Removing Ticks & Other Embedded Objects
- This is The Perfect Kit to Keep in Your Car



FAG25 (Office Kit)

First Aid Kit (upto 25 Persons)

Description

- Made of Strong ABS Plastic Which is Shiny, Smooth & Easy to Clean
- Contains Neoprene Seal Which Makes it Dust-Proof



FAO50 (Sports Plus Kit) FAW50 (Industry Kit)

First Aid Kit (Upto 50 Persons)

Description

- Made of Strong ABS Plastic Which is Shiny & Easy to Clean
- A Neoprene Seal is Fitted to Make The Kit Dust-Proof



First Aid Kit (Upto 50 Persons)

Description

- High Class Metal Design in White Color with Three Compartment
- It is Recommended for Industrial Companies, Hotels



FA100 (Workplace Kit)

First Aid Kit (Upto 100 Persons)

Description

- Made of Strong ABS Plastic Which is Shiny & Easy to Clean
- A Neoprene Seal is Fitted to Make The Kit Dust-Proof



Burn Kit

First Aid Kit with Bracket

- Burn First Aid Kit is a Vital Product for Burn Injuries
- Description The Contents are Apt for Small Burns & The Box Comes With The Brackets







BW C2-H H2S

H2S Personal Monitor, 24 Months			
Standard	UL Class 1/ATEX/IECEx/CE		
Size	2.8 x 5.0 x 8.6 cms		
Weight	92 g		
Features	 Detector Complete With Specified Sensor Stainless Steel Alligator Clip & Concussion-Proof Housing Test Cap, Instructions 		
Weight / Carton	1.55 kgs	We	
Carton Dimension	31 x 17 x 14 cms	Carto	
CBM / Carton	0.0007	C	
Packing / Carton	10 Pieces	Paci	
Origin	Mexico		





BW C3-H H2S

	H2S Persona	l Monitor, 36 Months
	Standard	UL Class 1/ATEX/IECEx/CE
	Size	2.8 x 5.0 x 8.6 cms
	Weight	92 g
р	Features	 Detector Complete With Specified Sensor Stainless Steel Alligator Clip & Concussion-Proof Housing Test Cap, Instructions
	Weight / Carton	1.55 kgs
	Carton Dimension	31 x 17 x 14 cms
	CBM / Carton	
	Packing / Carton	10 Pieces
	Origin	Mexico

BW Technologies



BW MICRO CLIP XL

Packing / Carton 1 Piece

Origin Mexico

Multi-Gas Detector Micro Clip XL

EMI/REI: Complies with EMC

Standard	Directive 89/336/EEC IP 66/67
Approvals	ATEX: II 1 G, Ex ia IIC T4 Ga
Size	11.3 x 6.0 x 2.9 cms
Weight	171 g
Features	 Choose The GasAlertMicroClip XL for Cold Weather Performance Intelliflash™ Verifies Operation & Compliance to Both the User & Supervisor Tamper-proof, One Button Operation Powered By a Rechargeable Lithium Polymer Battery Monitors H2S Co, O2 & LEL Compatible With Microdock li Quick Specs

BW Technologies



BW MAX XT II

Multi-Gas	Detector MAX XI II
Standard	EMI/RFI: Complies with EMC Directive 2004/108/EC IP66/67
Approvals	ATEX: II 1 G Ga Ex ia IIC T4
Size	13.1 x 7.0 x 5.2 cms
Weight	328 g
Features	 Continuous LCD Shows Real Time Gas Concentrations Water-Resistant Simple Automatic Calibration Procedure; Compatible with Bw Microdock II Automatic Test & Calibration Station Full Function Self-Test of Sensor, Battery Status, Circuit Integrity & Audible/Visual Alarms on Start Up Bright Visual Alarm Bars Built-in Concussion-Proof Boot Monitors H2S, CO, O2 & LEL
Packing / Carton	1 Piece
Origin	Mexico







Spill Kit Bin with Wheel (30, 60 Gallon)

Spin and the spin	Bag (5, 10 Gallon)
---	--------------------

Spill Kit Bin with Pedal (20 Gallon)

OIL SPILL KIT		Oil Spill Kit Contents				
		5 Gallone	10 Gallons	20 Gallons	30 Gallons	60 Gallons
Contents	Origin	o Callotta	To Gallotts	Zo Gallolis	ov Callotta	oo Gallolis
Sorbent Pad,EP100,15"x18"	USA	10 Pieces	25 Pieces	50 Pieces	100 Pieces	150 Pieces
WSOC440 White Oil-Only Socks 3" dia X 4'	USA	2 Piece	3 Piece	4 Piece	4 Piece	10 Pieces
WPIL818 White Oil-Only Pillows 8" X 18"	USA	-	-	2 Piece	4 Piece	8 Pieces
HD Disposal bag	China	1 Piece	1 Piece	2 Pieces	2 Pieces	4 Pieces
Plastic Scoop & Brush	China	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Instruction Sheet	-	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Empiral Vision Clear Goggle	Taiwan	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Nitrile Gloves	Sri Lanka	1 Pair	1 Pair	1 Pair	1 Pair	1 Pair
Spill Kit bag	China	1 Piece	1 Piece	-	-	-
Spill Kit Bin without wheel with Pedal (70L)	China	-	-	1 Bin	-	-
Spill Kit Bin with wheel (120L)	China	-	-	-	1 Bin	-
Spill Kit Bin with wheel (240L)	China	-	-	-	-	1 Bin

CHEMICAL SPILL KIT		Chemical Spill Kit Contents				
		5 Gallone	10 Gallons	20 Gallons	30 Gallons	60 Gallone
Contents	Origin	5 Gallotta	TO Callotts	ZV Gallotis	JU Gallotta	oo Gallotis
BYP100S Yellow Chemical Light Weight MeltBlown Pads 20"L x 16"W	USA	10 Pieces	25 Pieces	50 Pieces	100 Pieces	150 Pieces
YSOC440 3" X 4' Yellow Chemical Socks	USA	2 Piece	3 Piece	4 Piece	4 Piece	10 Pieces
YPIL818 Yellow Chemical Pillows 8" x 18"	USA	-	-	2 Piece	4 Piece	8 Pieces
HD Disposal bag	China	1 Piece	1 Piece	2 Pieces	2 Pieces	4 Pieces
Plastic Scoop & Brush	China	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Instruction Sheet	-	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Empiral Vision Clear Goggle	Taiwan	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Nitrile Gloves	Sri Lanka	1 Pair	1 Pair	1 Pair	1 Pair	1 Pair
Spill Kit bag	China	1 Piece	1 Piece	-	-	-
Spill Kit Bin without wheel with Pedal (70L)	China	-	-	1 Bin	-	-
Spill Kit Bin with wheel (120L)	China	-	-	-	1 Bin	-
Spill Kit Bin with wheel (240L)	China	-	-	-	-	1 Bin



3M

3M SS Cleaner & Polish

Stainless Steel Cleaner & Polish, 21 oz Aerosol			
Standard	NSF A-7 Registered		
Features	 Cleans & Polishes in One Step Leaves No Greasy Build-up on Surfaces Pleasant Citrus Fragrance Resists Streaking NSF® Certified for Use in Federally-Inspected Meat & Poultry Processing Plants 		
Applications	 Stainless Steel, Chrome Architectural Aluminum Other Interior Metal Surfaces Appliances, Bathrooms Fixtures/Equipment, Fryers, Griddles Grills, Hoods, Kitchens/Dining 		
Weight / Carton	9.43 Kgs		
Carton Dimension	31 x 24 x 24 cms		
CBM / Carton	0.01786		
Packing / Carton	12 Bottles		
Origin	USA		







Scaffolding Tage

Scarrolding rags					
Danger Tag					
Features	 Insert in Each Holder 2 Pcs Marking Pen UV Resistant Impact Resistant Safety Approved Background Color: White Legend Style: Text Legend Color: Red Header: Danger 				
Applications	 Construction Industry Work on Scaffolds Frequently From Steel Erectors to Building Equipment Installers, Bricklayers, Window Washers Carpenters & Painters 				
Weight / Carton	8.57 kgs				
Carton Dimension	34 x 22 x 34 cms				
CBM / Carton	0.0254				
Packing / Carton					
Packing / Packet	10 Holders + 20 Tags + 2 Marking Pens				
Origin	India / China				



Fusion International Group LLC

P.O BOX. 124401, Aspin Tower, Sheikh Zayed Road, Dubai, U.A.E Email: sales@fusiongroupfz.com, www.fusiongroupfz.com
Tel/Fax +971 (0)67649782, Mob: +971 (0) 58 586 3916 / 54 768 3916









